


WAAS CH 70537 W19A	APP CRS 207°	Rwy Ldg 7100 TDZE 5286 Apt Elev 5318
--	------------------------	---

RNAV (GPS) RWY 19

RNP APCH-GPS.		MISSED APPROACH: Climb to 12000 direct EMCUE, and track 250° to GEERY, and track 173° to DETAN and hold.
	Rwy 19 helicopter visibility reduction below 3/4 SM NA. When local altimeter setting not received, procedure NA.	* Missed approach requires minimum climb of 380 feet per NM to 9600.
		# Missed approach requires minimum climb of 390 feet per NM to 9600.
	-11°C	

AWOS-3 133.375	SALT LAKE CITY CENTER 125.575 379.275	UNICOM 122.8 (CTAF) 0
--------------------------	---	---------------------------------

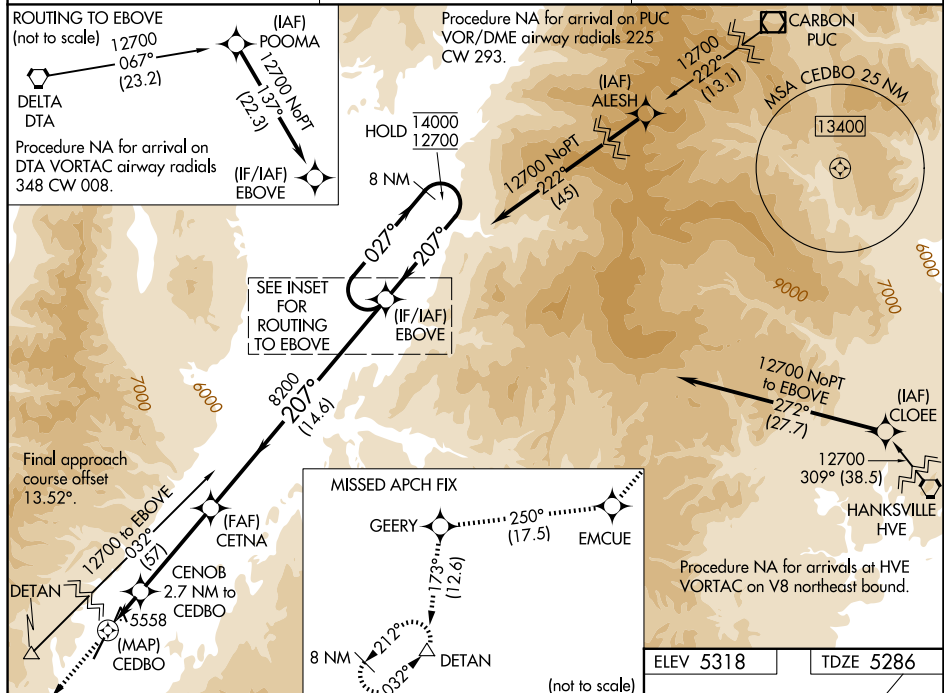

12000 ↑	EMCUE ✱	tr 250°	GEERY ✱	tr 173°	DETAN △	Visual Segment - Obstacles.	
						EBOVE	8 NM Holding Pattern
						027° → 14000 ← 207° 12700	

CATEGORY	A	B	C	D
LP MDA*	5880-1	594 (600-1)	5880-1 $\frac{3}{4}$ 594 (600-1 $\frac{3}{4}$)	NA
LP MDA	7340-1 $\frac{1}{4}$ 2054 (2100-1 $\frac{1}{4}$)	7340-1 $\frac{1}{2}$ 2054 (2100-1 $\frac{1}{2}$)	7340-3 2054 (2100-3)	NA
LNAV MDA#	6340-1 $\frac{1}{4}$ 1054 (1100-1 $\frac{1}{4}$)	6340-1 $\frac{1}{2}$ 1054 (1100-1 $\frac{1}{2}$)	6340-3 1054 (1100-3)	NA
LNAV MDA	7440-1 $\frac{1}{4}$ 2154 (2200-1 $\frac{1}{4}$)	7440-1 $\frac{1}{2}$ 2154 (2200-1 $\frac{1}{2}$)	7440-3 2154 (2200-3)	NA
CIRCLING	7440-1 $\frac{1}{4}$ 2122 (2200-1 $\frac{1}{4}$)	7440-1 $\frac{1}{2}$ 2122 (2200-1 $\frac{1}{2}$)	7440-3 2122 (2200-3)	NA

