

WAAS CH 42909 W36A	APP CRS 359°	Rwy Ldg TDZE Apt Elev	5000 54 55
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) RWY 36


PICAYUNE MUNI (MJD)

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Stennis Intl altimeter setting. DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA. Procedure NA when R-4403 A, B, C, or E is active. When local altimeter setting not received, use Stennis Intl altimeter setting: increase LPV DA to 338 and all Cats visibility ½ mile; increase LNAV/VNAV DA to 374 and all Cats visibility ½ mile; increase all MDA 40 feet and LNAV Cats C and D visibility ½ mile, and Circling Cat C visibility ¼ mile.

MISSED APPROACH:
Climb to 1800 direct CIQYI and hold.

AWOS-3PT 119.075	GULFPORT APP CON ★ 124.6 354.1	UNICOM 122.8 (CTAF) 0
----------------------------	--	---------------------------------

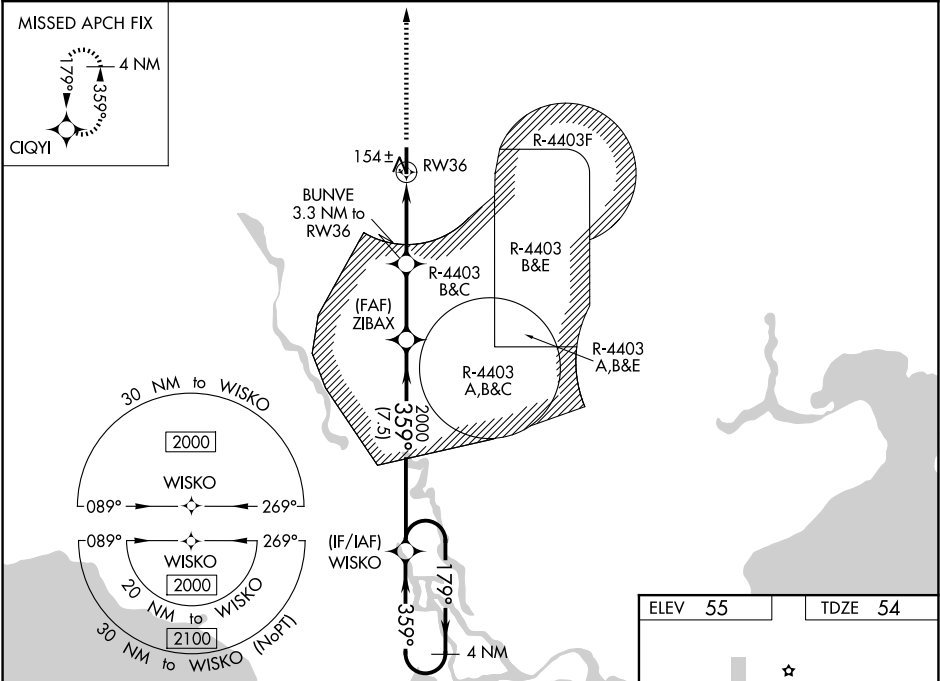

1800 CIQYI

*LNAV only.

CATEGORY	A	B	C	D
LPV DA		304-7/8	250 (300-7/8)	
LNAV/VNAV DA		340-1	286 (300-1)	
LNAV MDA		420-1	366 (400-1)	
CIRCLING	480-1 425 (500-1)	580-1 525 (600-1)	700-1¾ 645 (700-1¾)	960-3 905 (1000-3)

ELEV 55 TDZE 54

SC-4, 22 JAN 2026 to 19 FEB 2026

SC-4, 22 JAN 2026 to 19 FEB 2026