

WAAS CH 65740 W24A	APP CRS 236°	Rwy Ldg 6001 TDZE 4237 Apt Elev 4265
--	------------------------	---

RNAV (GPS) RWY 24

SILVER SPRINGS (SPZ)


⚠

NA

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -23°C (-9°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Use Fallon NAS (Van Voorhis Fld) altimeter setting; when not received, use Reno/Tahoe Intl altimeter setting.

MISSED APPROACH: Climb to 6900 then climbing left turn to 9900 direct HZN VORTAC and hold, continue climb-in-hold to 9900.
*Missed approach requires minimum climb of 315 feet per NM to 6900.

AWOS-2 120.475	KNFL ATIS* 370.925	NAVY FALLON APP CON 120.85 360.2	CTAF 122.90
--------------------------	------------------------------	--	-----------------------

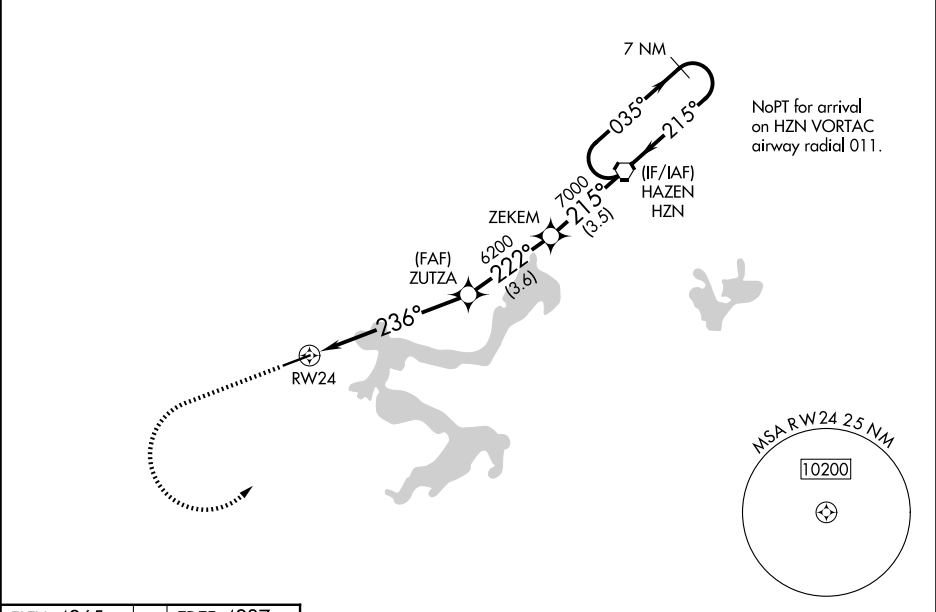

ELEV 4265

TDZE 4237

MIRL Rwy 6-24

REIL Rws 6 and 24

6900

9900

HZN