

WAAS CH 90116 W01A	APP CRS 013°	Rwy Ldg TDZE Apt Elev	6000 467 488
--	------------------------	-----------------------------	---

APP CRS
013°

Rwy Ldg	6000
TDZE	467
Apt Elev	488


RNAV (GPS) RWY 1
BEECH RIVER RGNL (PVE)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5° F) or above 54°C (130°F) DME/DME RNP-0.3 NA. When local altimeter setting not received, use Jackson altimeter setting: increase LPV all Cats DA to 807 and all Cats visibility $\frac{1}{2}$ mile; increase LNAV/VNAV all Cats DA to 91 and all Cats visibility $\frac{1}{2}$ mile; increase all MDA 100 feet and LNAV Cats C/D and Circling Cat C visibility $\frac{1}{2}$ mile and Circling Cat D visibility $\frac{1}{2}$ mile. Baro-VNAV and VDP NA when using Jackson altimeter setting.


MISSED APPROACH:
Climb to 3000 direct
EYODI and hold.

AWOS-3
118.125

MEMPHIS CENTER
125.85 379.25

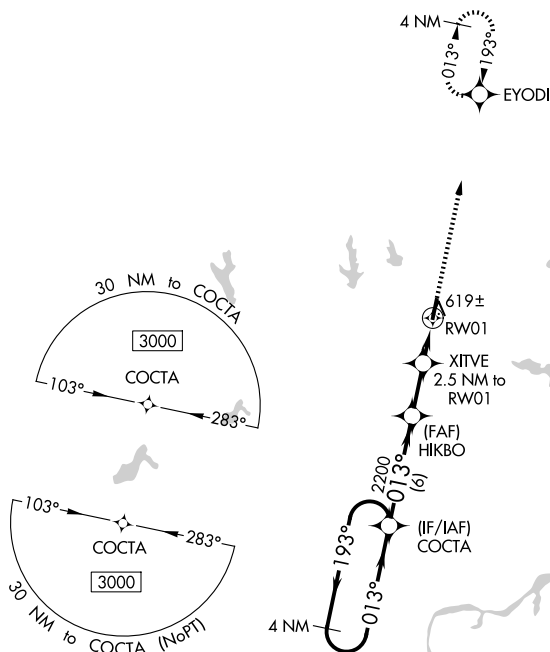UNICOM
123.0 (CTAF) 

ELEV	488		TDZE	467
------	-----	--	------	-----

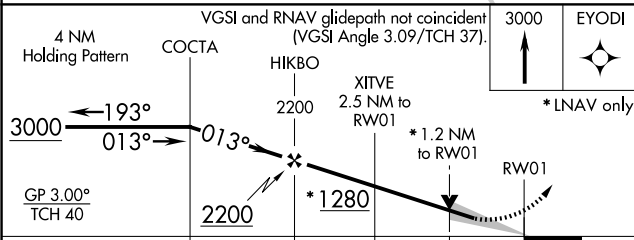

		6 NM		2.9 NM		1.3 NM		1.2 NM	
CATEGORY		A		B		C		D	
LPV	DA	717-7 $\frac{7}{8}$				250 (300-7 $\frac{7}{8}$)			
RNAV/ VNAV	DA	821-1 $\frac{1}{4}$				354 (400-1 $\frac{1}{4}$)			
RNAV	MDA	880-1 413 (400-1)				880-1 $\frac{1}{8}$ 413 (400-1 $\frac{1}{8}$)			
CIRCLING		940-1 452 (500-1)		980-1 492 (500-1)		1000-1 $\frac{1}{2}$ 512 (600-1 $\frac{1}{2}$)		1200-2 $\frac{1}{4}$ 712 (800-2 $\frac{1}{4}$)	

