

WAAS CH 69238 W23A	APP CRS 231°	Rwy Ldg 4003 TDZE 964 Apt Elev 964
--	------------------------	---

APP CR
231°

Rwy Ldg	4003
TDZE	964
Apt Elev	964

RNAV (GPS) RWY 23

SEARCY COUNTY (4A5)


▼ DME/DME RNP-0.3 NA. Procedure NA at night. Circling NA SE of Rwy 5-23. Baro-VNAV NA.
▲ NA Use Flippin alimeter setting; when not received, use Harrison alimeter setting and increase all Cats
 LPV DA to 1555 and visibility $\frac{1}{8}$ mile, LNAV/VNAV all Cats DA to 2016, and all MDA 60 feet,
 LNAV Cat B/C and Circling Cat C visibility $\frac{1}{4}$ mile. Helicopter visibility reduction below 1 SM NA.

MISSED APPROACH:
Climb to 4000 direct
MERLS and hold.


FLP AWOS-3
132,075

MEMPHIS CENTER
126.85 281.55

CTAF
22.9 L

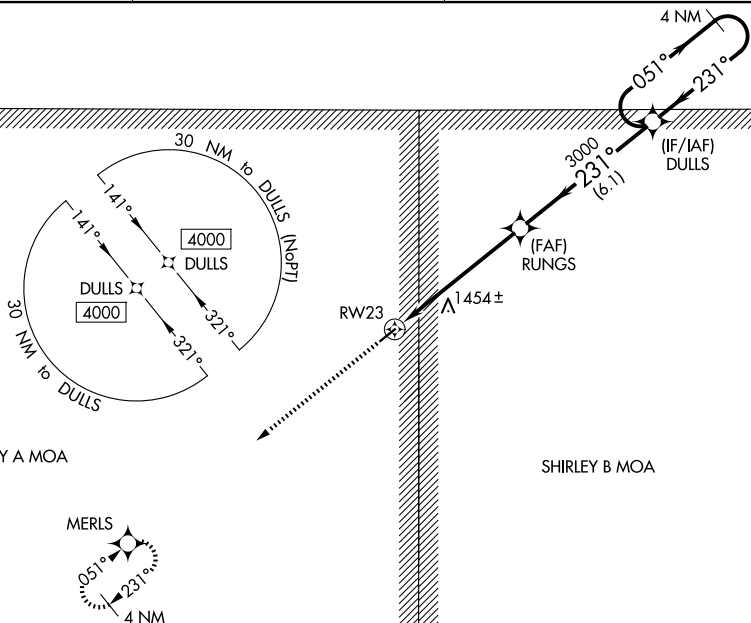

ELEV 964		TDZE 964
----------	--	----------



MIRL Rwy 5-23 **L**
REIL Rwy 5 and 23 **L**

Diagram illustrating the RW23 holding pattern. The pattern is a series of turns: a 4000 ft altitude, a 4 NM holding pattern, a 051° turn, a 231° turn, a 3000 ft altitude, a 231° turn, a 3000 ft altitude, and a 051° turn. The pattern is labeled 'RW23' and 'DULLS'. The diagram also shows the '4000' and 'MERLS' VOR stations. The diagram is labeled 'GP 3.25° TCH 44'.