


WAAS CH 42628 W07A	APP CRS 074°	Rwy Idg TDZE Apt Elev	5000 1112 1122
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 7
BELLEFONTAINE RGNL (ED.J)

NA For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 37°C (98°F). DME/DME RNP-0.3 NA. VDP and Baro-VNAV NA with James M. Cox Dayton Intl altimeter setting. When local altimeter setting not received, use James M. Cox Dayton Intl altimeter setting: increase LPV DA to 1456 feet, LNAV/VNAV DA to 1598 feet, and all MDAs 100 feet, and increase LPV and LNAV/VNAV all Cats visibility ¼ SM, LNAV Cats C and D visibility ⅓ SM, and Circling Cat C visibility ½ SM and Cat D visibility ¼ SM.	MISSED APPROACH: Climb to 1600 then climbing left turn to 3000 direct BUTYN and hold.
--	---

AWOS-3 118.075	COLUMBUS APP CON 134.45 294.5	UNICOM 122.8 (CTAF) 0
--------------------------	---	---------------------------------

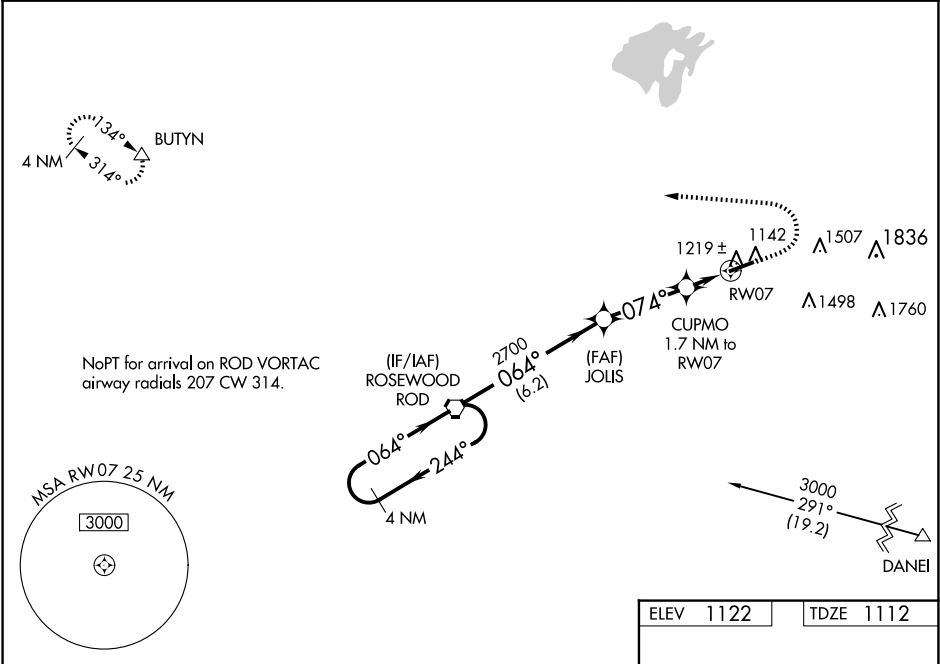

4 NM Holding Pattern		ROD VORTAC	JOLIS	1600	3000	BUTYN
3000 ← 244°		064° →	064°	2700	CUPMO 1.7 NM to RW07	* LNAV only.
GP 3.00° TCH 41		2700	* 074°	* 1.1 NM to RW07	RW07	
		6.2 NM	3.2 NM	0.7 NM	1.1 NM	
CATEGORY	A	B	C	D		
LPV DA	1362-7/8		250 (300-7/8)			
LNAV/VNAV DA	1504-13/8		392 (400-13/8)			
LNAV MDA	1480-1		368 (400-1)			
CIRCLING	1620-1 498 (500-1)	1640-1 518 (600-1)	1860-2 738 (800-2)	1980-2 3/4 858 (900-2 3/4)		

ELEV 1122	TDZE 1112
-----------	-----------

1600 3000 BUTYN

* LNAV only.

CUPMO 1.7 NM to RW07

* 1.1 NM to RW07

RW07

5000 X 100

0.4% UP

074°

1178

MIRL Rwy 7-25 0

REIL Rwy 7 and 25 0

EC-2, 22 JAN 2026 to 19 FEB 2026

EC-2, 22 JAN 2026 to 19 FEB 2026