


WAAS CH 56529 W07A	APP CRS 067°	Rwy Idg TDZE Apt Elev	5099 3490 3490
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 7
ROUNDUP (RPX)

▽ Use Billings altimeter setting, when not received, procedure NA.
△ NA When VGSi inop, Straight-in/Circling Rwy 7 procedure NA at night.
DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA.

MISSED APPROACH: Climb to 6300 direct PULAE and hold.

BIL ASOS 126.3	SALT LAKE CENTER 126.85 305.2	UNICOM 122.8 (CTAF)	122.7 0
--------------------------	---	-------------------------------	-----------------------

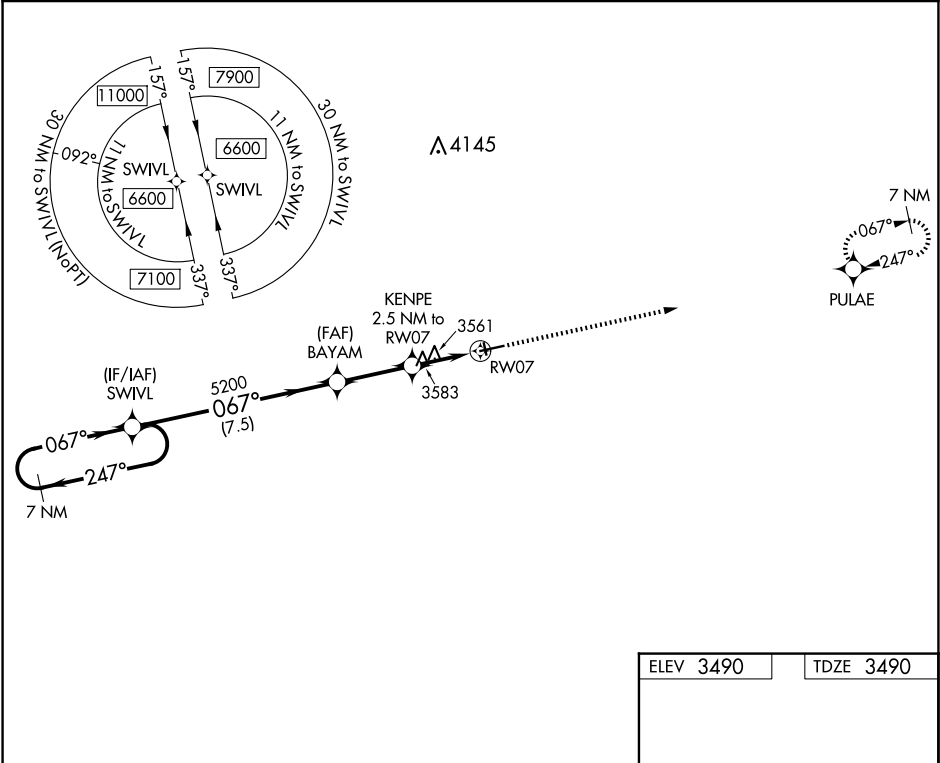

7 NM Holding Pattern		SWWL		VGSI and descent angles not coincident (VGSI Angle 4.00/TCH 43).		6300	PULAE
6600		5200		4320		RW07	
7.5 NM		2.7 NM		2.5 NM			
CATEGORY	A	B	C	D			
LP MDA	3940-1	450 (500-1)	3940-1 $\frac{3}{8}$	450 (500-1 $\frac{3}{8}$)			
LNAV MDA	3960-1	470 (500-1)	3960-1 $\frac{3}{8}$	470 (500-1 $\frac{3}{8}$)			
CIRCLING	4000-1	510 (600-1)	4140-1 $\frac{3}{4}$ 650 (700-1 $\frac{3}{4}$)	4340-2 $\frac{3}{4}$ 850 (900-2 $\frac{3}{4}$)			

ELEV 3490 TDZE 3490

MIRL Rwy 7-25 **0**