

APP CRS	Rwy Idg	N/A
328°	TDZE	N/A
	Apt Elev	22

RNAV (GPS)-A

HARVEY FLD (S43)


▼

DME/DME RNP-0.3 NA. Procedure NA at night. Use Arlington altimeter setting. When not received, use Everett altimeter setting and increase all MDA 60 feet. Helicopter visibility reduction below 1 SM NA.

▲ NA

MISSED APPROACH: Climb to 2000 direct USUXY and via 333° track to WATON LOM and hold.

AWO AWOS-3PT 135.625	SEATTLE APP CON 128.5 306.9	UNICOM 123.0 (CTAF)
-------------------------	--------------------------------	------------------------

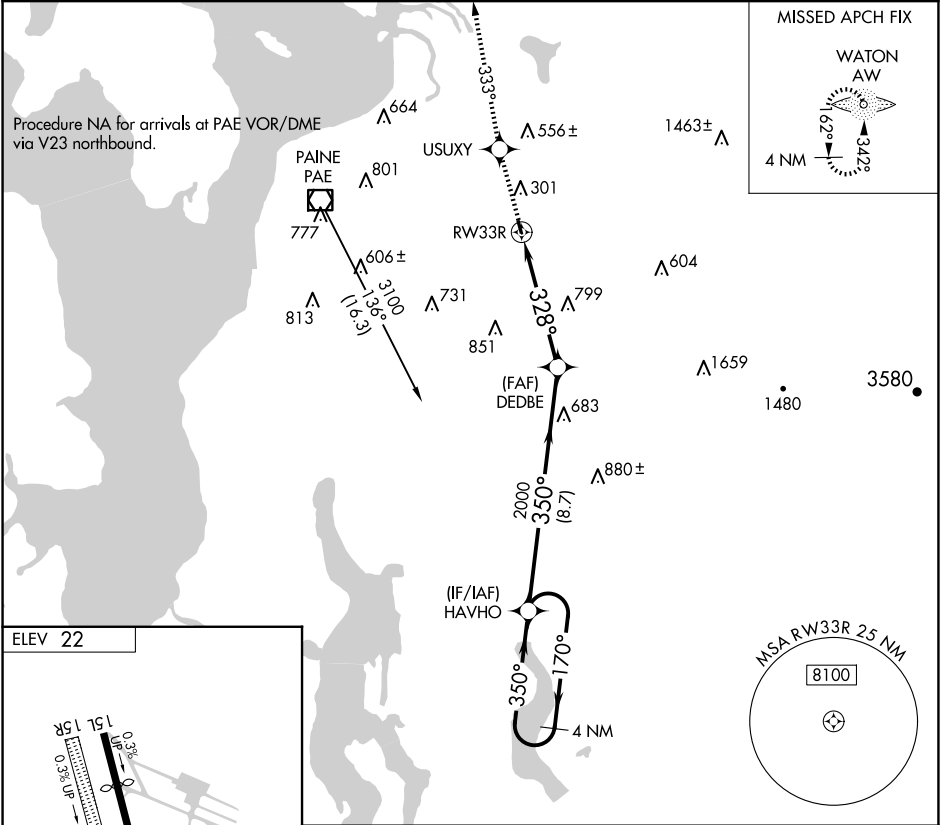

ELEV 22

LIRL Rwy 15L-33R

2000

USUXY

333° tr

AW

Visual Segment - Obstacles.

2000

333°

350°

170°

3100

4 NM Holding Pattern

HAVHO

DEDBE

328°

350°

5 NM

8.7 NM

2000

RW33R

CATEGORY	A	B	C	D
CIRCLING	1220-1¼ 1198 (1200-1¼)	1220-1½ 1198 (1200-1½)	NA	