

WAAS CH 93902 W13A	APP CRS 126°	Rwy Idg 5500 TDZE 1124 Apt Elev 1126
--	------------------------	---

RNAV (GPS) RWY 13

WILLMAR MUNI/JOHN L RICE FLD (BDH)

RNP APCH - GPS.

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Circling NA to Rwy's 3 and 21. Inop table does not apply to LPV. For inop ALS, increase LNAV/VNAV all Cats visibility to 1½ SM, LNAV Cts A and B to 1 SM and LNAV Cts C and D visibility to 1½ SM. When local altimeter setting not received, use Olivia altimeter setting: increase LPV DA to 1379 feet; increase LNAV/VNAV DA to 1584 feet and all visibilities ½ SM; increase all MDAs 60 feet and Circling visibility Cat D ½ SM. Baro-VNAV and VDP NA when using Olivia Rgnl altimeter setting.

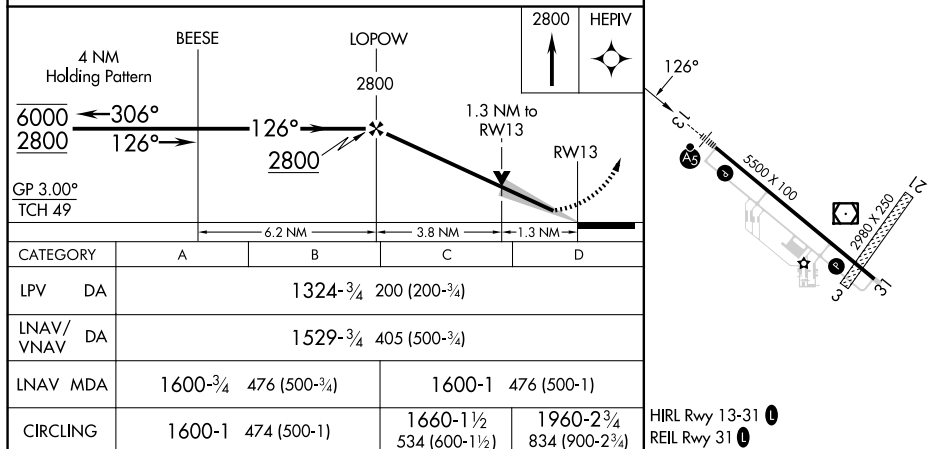
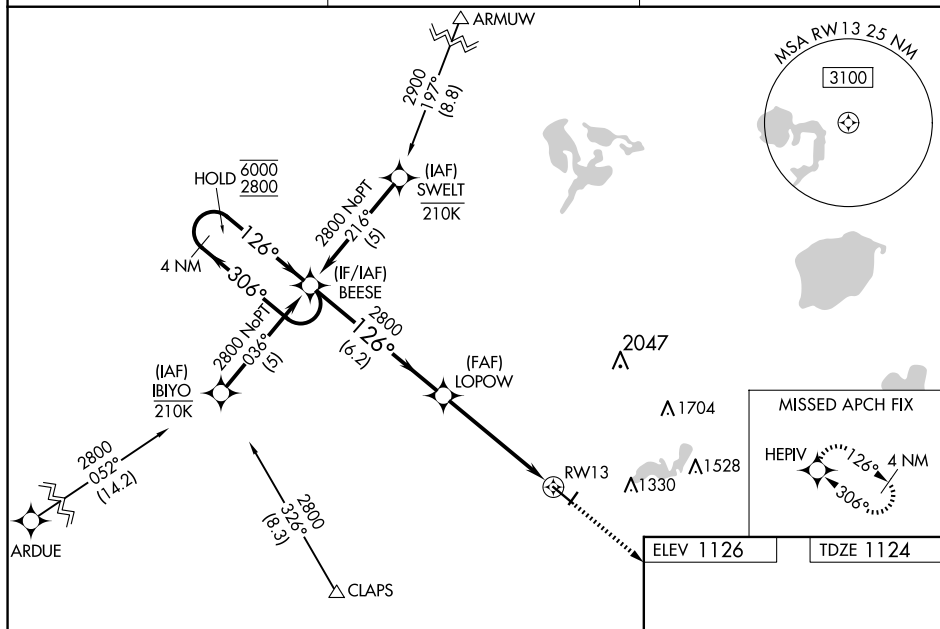
MALSR



MISSED APPROACH:
Climb to 2800 direct
HEPIV and hold.

AWOS-3PT
118.75

MINNEAPOLIS CENTER
125.5 323.1

UNICOM
122.8 (CTAF) **L**

CATEGORY	A	B	C	D
LPV DA	1324- $\frac{3}{4}$ 200 (200- $\frac{3}{4}$)			
LNAV/ VNAV DA	1529- $\frac{3}{4}$ 405 (500- $\frac{3}{4}$)			
LNAV MDA	1600- $\frac{3}{4}$ 476 (500- $\frac{3}{4}$)		1600-1 476 (500-1)	
CIRCLING	1600-1 474 (500-1)		1660-1 $\frac{1}{2}$ 534 (600-1 $\frac{1}{2}$)	1960-2 $\frac{3}{4}$ 834 (900-2 $\frac{3}{4}$)

HIRL Rwy 13-31 **L**
REIL Rwy 31 **L**