

WAAS CH 78313 W24A	APP CRS 244°	Rwy Ldg 4000 TDZE 55 Apt Elev 55
--	------------------------	---

RNAV (GPS) RWY 24

ROBERT/BOB/CURTIS MEML (D76) (PFNO)

RNP APCH.

 For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C.

MISSED APPROACH: Climb to 2700 direct ODME and hold, continue climb-in-hold to 2700.

AWOS-3P

120.0



ANCHORAGE CENTER

119.2 263.0

CTAF



122.7 0

MISSED APCH FIX

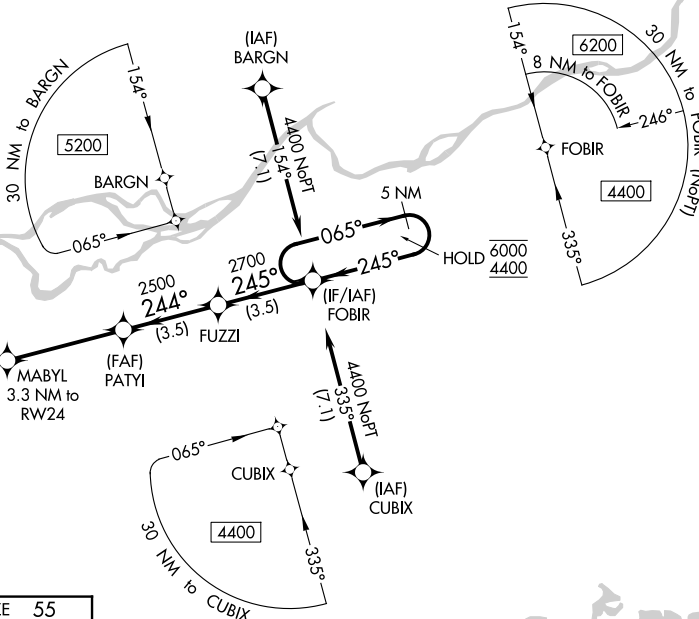

ELEV 55

TDZF 55

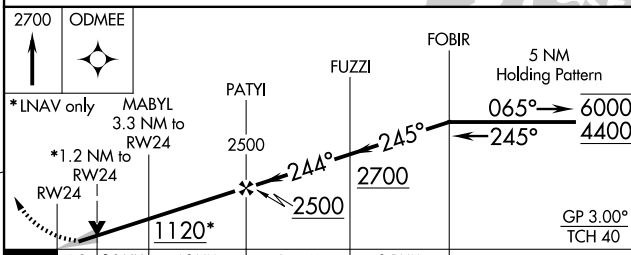

	1.2	2.1 NM	4.3 NM	3.5 NM	3.5 NM	
CATEGORY	A	B	C	D		
LPV DA	305-1 250 (300-1)					
LNAV/VNAV DA	355-1 300 (300-1)					
LNAV MDA	460-1 405 (500-1)			460-1½ 405 (500-1½)		
CIRCLING	520-1 465 (500-1)			520-1½ 465 (500-1½)		760-2¼ 705 (800-2¼)

MIRL Rwy 6-24 **L**

Amdt 1 31DEC20

Amdt 1 31DEC20

ROBERT/BOB/CURTIS MEML (D76) (PFNO)

RNAV (GPS) RWY 24

66°49'N-161°01'W

AK, 22 JAN 2026 to 19 MAR 2026