

WAAS CH 56637 W25A	APP CRS 248°	Rwy Ldg TDZE 966 Apt Elev 966
--	------------------------	---

RNAV (GPS) RWY 25


BLOYER FLD (Y72)

RNP APCH - GPS.

Obtain local altimeter setting on CTAF. when not received, use CMY altimeter setting and increase all MDAs 20 feet. Rwy 7 helicopter visibility reduction below 1 SM NA. Procedure NA at night.

MISSED APPROACH: Climb to 3000 direct FOSAT and hold.

VOLK APP CON ★ 135.25 244.875	VOLK CTAF 127.5	CTAF 122.9 0
---	---------------------------	------------------------

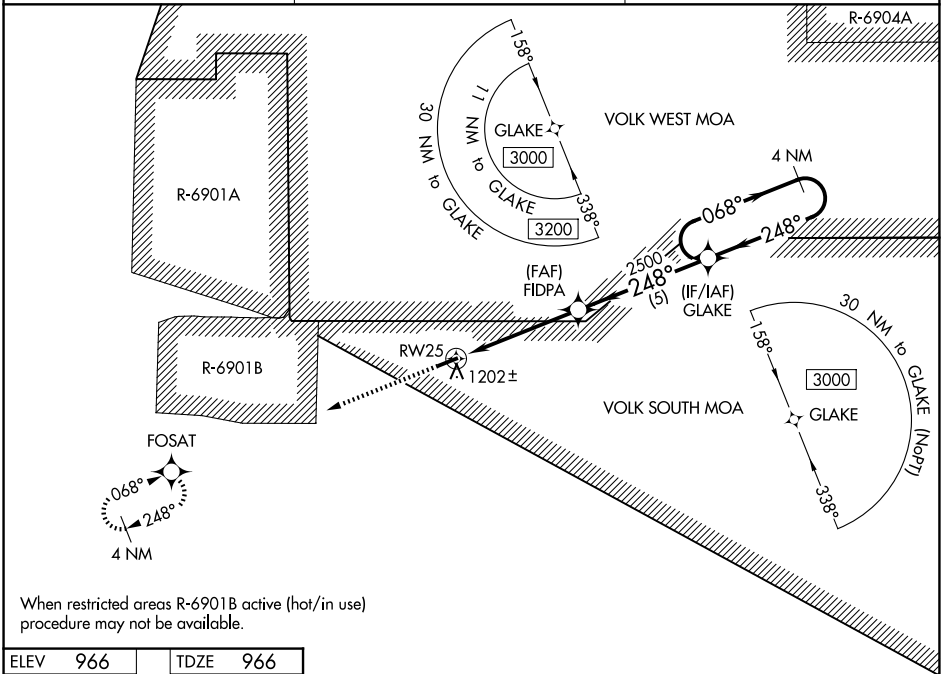

ELEV 966	TDZE 966
----------	----------

3000 FOSAT

3900 X 75

248°

25

7

VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 35).

4 NM Holding Pattern

GLAKE

068°

248°

3000

FIDPA

2500

≤ 3.00° TCH 40

RW25

4.7 NM

5 NM

CATEGORY	A	B	C	D
LP MDA	1440-1	474 (500-1)	1440-1 ³ / ₈ 474 (500-1 ³ / ₈)	NA
LNAV MDA	1480-1	514 (600-1)	1480-1 ³ / ₈ 514 (600-1 ³ / ₈)	NA
CIRCLING	1540-1 574 (600-1)	1560-1 594 (600-1)	1660-2 694 (700-2)	NA

MIRL Rwy 7-25 0

REIL Rwy 7 and 25 0