

WAAS CH 81839 W13A	APP CRS 133°	Rwy Ldg TDZE Apt Elev	5701 2948 2965
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 13

BOWMAN RGNL (BWW)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C (-4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Hettinger altimeter setting and increase all DA 102 feet, and all MDA 120 feet; increase LPV and LNAV/VNAV visibility ¼ mile all Cats, and LNAV Cat C visibility ⅜ mile. Baro-VNAV and VDP NA when using Hettinger altimeter setting.

MISSED APPROACH:
Climb to 3400 then climbing left turn to 6000 direct HAYNI and hold.

AWOS-3PT 118.075	SALT LAKE CITY CENTER 126.85 305.2	UNICOM 122.8 (CTAF) 1
----------------------------	--	---------------------------------

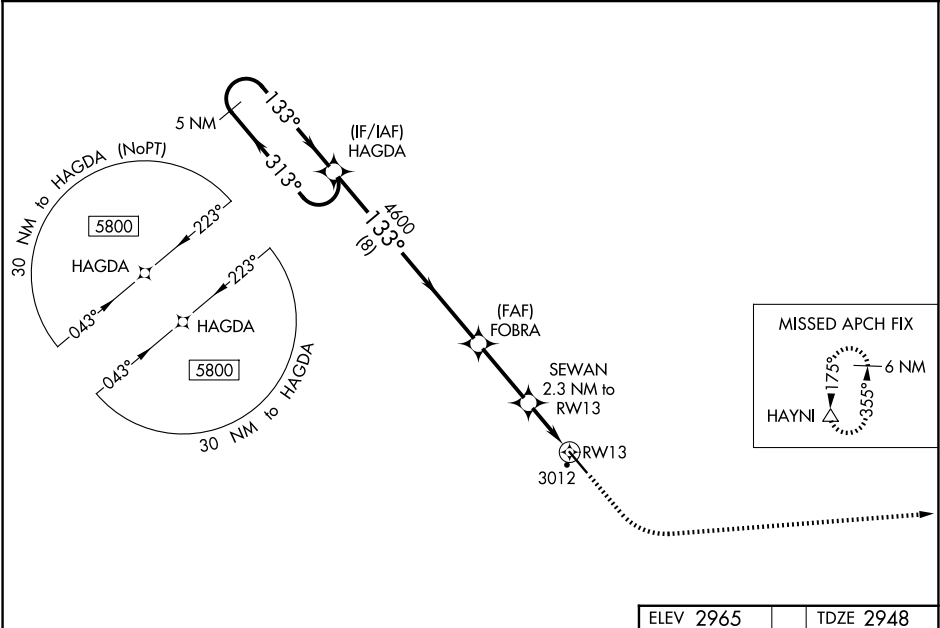

5 NM Holding Pattern

HAGDA

5800

GP 3.00° TCH 40

3400

6000

HAYNI

313°

133°

133°

133°

4600

4600

3700

3700

8 NM

2.8 NM

1.4 NM

0.9 NM

FOBRA

SEWAN 2.3 NM to RW13

RW13

* LNAV only

5701 x 75

CATEGORY	A	B	C	D
LPV DA	3198-1 250 (300-1)			
LNAV/VNAV DA	3198-1 250 (300-1)			
LNAV MDA	3280-1 332 (400-1)			
CIRCLING	3380-1 415 (500-1)	3420-1 455 (500-1)	3580-1¾ 615 (700-1¾)	3580-2 615 (700-2)

REIL Rwy 13 and 31 1

MIRL Rwy 13-31 1