


Minimum Climb Rate to 500

NORFOLK, VIRGINIA
NORFOLK NS HELIPORT (KNHU)

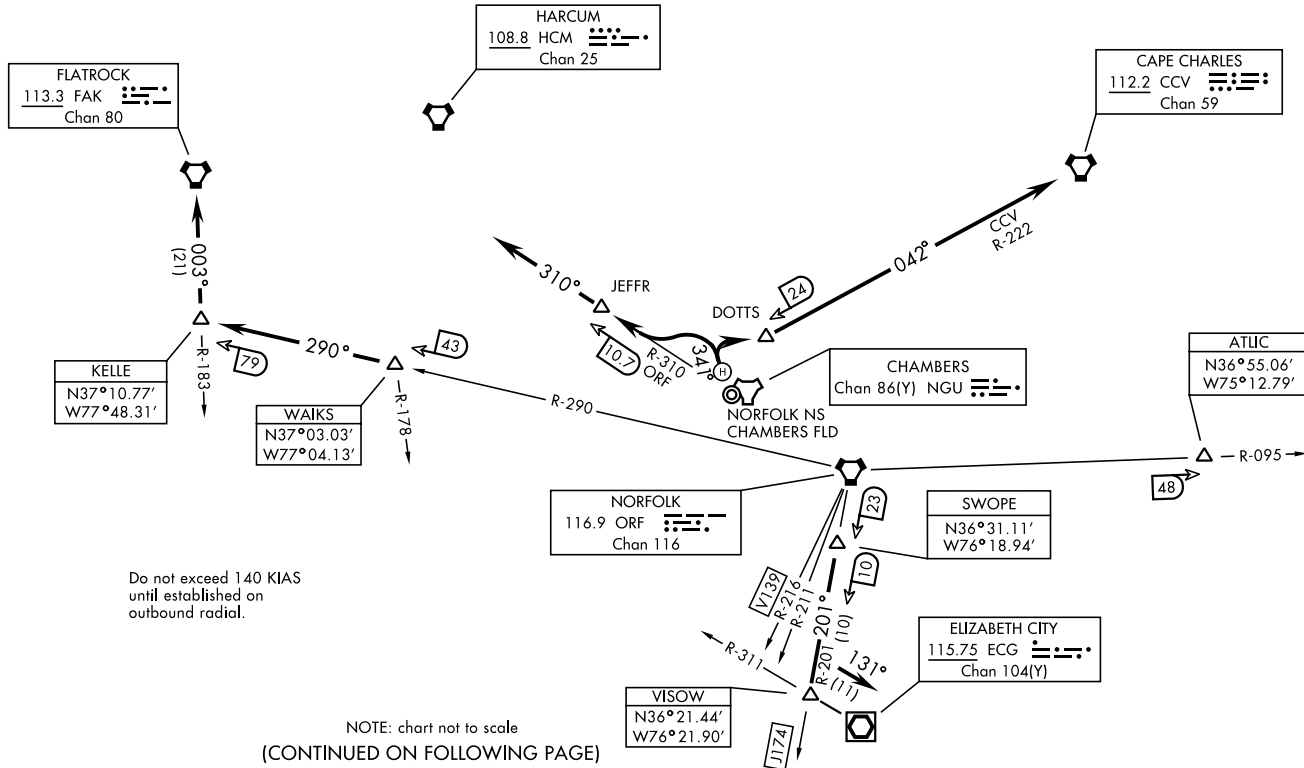

NOTE: chart not to scale
(CONTINUED ON FOLLOWING PAGE)

▼

DEPARTURE ROUTE DESCRIPTION

TAKEOFF HELIPORT WESTBOUND: Climb heading 341° then climbing left turn to JEFFR, minimum climb rate 500 ft/NM to 500, thence...

TAKEOFF HELIPORT EASTBOUND: Climb heading 341° then climbing right turn to DOTTS, minimum climb rate 500 ft/NM to 500, thence...

...via RADAR vectors to assigned transition. Maintain 2000 or assigned altitude. Expect clearance to requested altitude/flight level 10 minutes after departure.

ATLUC TRANSITION (NHU2.ATLUC): Via vectors to ATLUC.

CAPE CHARLES TRANSITION (NHU2.CCV): Via vectors to CCV VORTAC. (NOTE: For altitudes 5000 and below).

ELIZABETH CITY TRANSITION (NHU2.ECG): Via vectors to SWOPE, then via ORF VORTAC R-201 to VISOW (ORF R-201/33 DME), then direct ECG VOR/DME.

FLAT ROCK TRANSITION (NHU2.FAK): Via vectors to WALKS, then via ORF VORTAC R-290 to KELLE, then direct FAK VORTAC.

HARCUM TRANSITION (NHU2.HCM): Via vectors to HCM VORTAC.

V139 TRANSITION (NHU2.ORE): Via vectors to V139.

NOTE: Transitions are part of the Preferred Departure Route (PDR) system and established as an Air Traffic flow procedure from the Norfolk Terminal Area. These fixes are to be used as the initial filing point out of NS Norfolk.