



WAAS CH 58047 W15A	APP CRS 151°	Rwy Ldg 4364 TDZE 2030 Apt Elev 2034
--	------------------------	---

RNAV (GPS) RWY 15

ASHLEY MUNI(ASY)

RNP APCH - GPS.	
▼ NA Baro-VNAV NA. Rwy 15 helicopter visibility reduction below ¾ SM NA. Use 7L2 altimeter setting; when not received, use MBG altimeter setting and increase LPV DA to 2448 feet and all visibilities ¼ SM. Increase LNAV/VNAV DA to 2477 feet and all visibilities ¼ SM. Increase all MDAs 40 feet and LNAV visibility Cat C/D ¼ SM, and Circling visibility Cat C ¼ SM.	MISSED APPROACH: Climb to 4000 direct PESSO and hold.

7L2 AWOS-3 118.175	MINNEAPOLIS CENTER 135.25 256.7	CTAF 122.9
------------------------------	---	----------------------

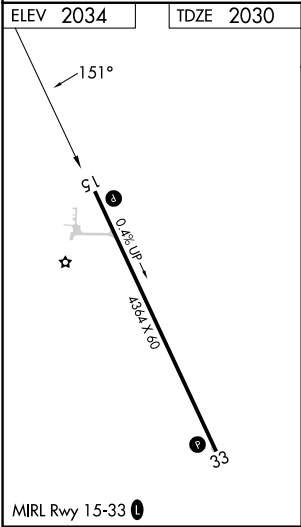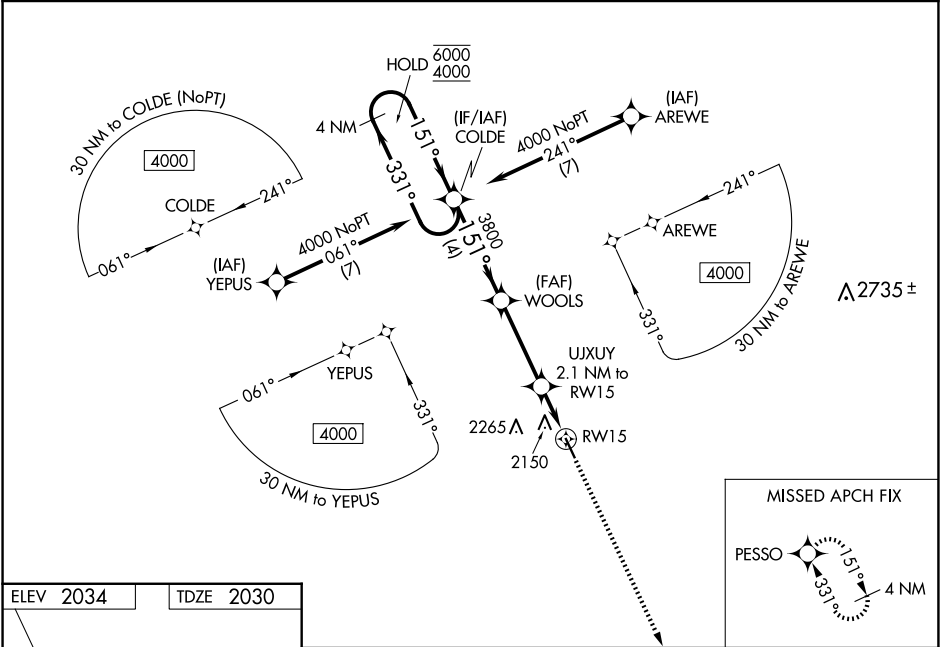

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 27).				4000	PESSO
4 NM Holding Pattern				↑	✧
GP 3.00° TCH 40				3800	UJXUY 2.1 NM to RW15
COLDE				3800	WOOLS
331°				2720	RW15
151°				4 NM	3.4 NM
CATEGORY				D	
LPV DA				2408-1 378 (400-1)	
LNAV/VNAV DA				2437-1½ 407 (500-1½)	
LNAV MDA				2540-1 510 (600-1)	
CIRCLING				2600-1 566 (600-1)	
				2700-1 666 (700-1)	
				2700-1¾ 666 (700-1¾)	
				2800-2½ 766 (800-2½)	