

|                                        |                        |                                                               |
|----------------------------------------|------------------------|---------------------------------------------------------------|
| WAAS<br>CH <b>98719</b><br><b>W35A</b> | APP CRS<br><b>352°</b> | Rwy Idg <b>3776</b><br>TDZE <b>861</b><br>Apt Elev <b>861</b> |
|----------------------------------------|------------------------|---------------------------------------------------------------|


RNAV (GPS) RWY 35  
MARION (C17)

RNP APCH - GPS.

**V** Baro-VNAV NA. Circling Rwy 17, NA at night. Circling NA for Cat B west of Rwy 17/35. Use The Eastern Iowa altimeter setting; when not received, use Monticello Rgnl altimeter setting: increase LPV DA to 1133; increase LNAV/VNAV DA to 1162; increase all MDAs 40 feet. For uncompensated Baro-VNAV system, LNAV/VNAV NA below -6°C or above 54°C.

MISSED APPROACH: Climb to 2600  
direct HENCH and hold.

|                           |                                               |                                 |
|---------------------------|-----------------------------------------------|---------------------------------|
| CID ASOS<br><b>124.15</b> | CEDAR RAPIDS APP CON *<br><b>134.05 266.8</b> | UNICOM<br><b>122.7 (CTAF) 0</b> |
|---------------------------|-----------------------------------------------|---------------------------------|

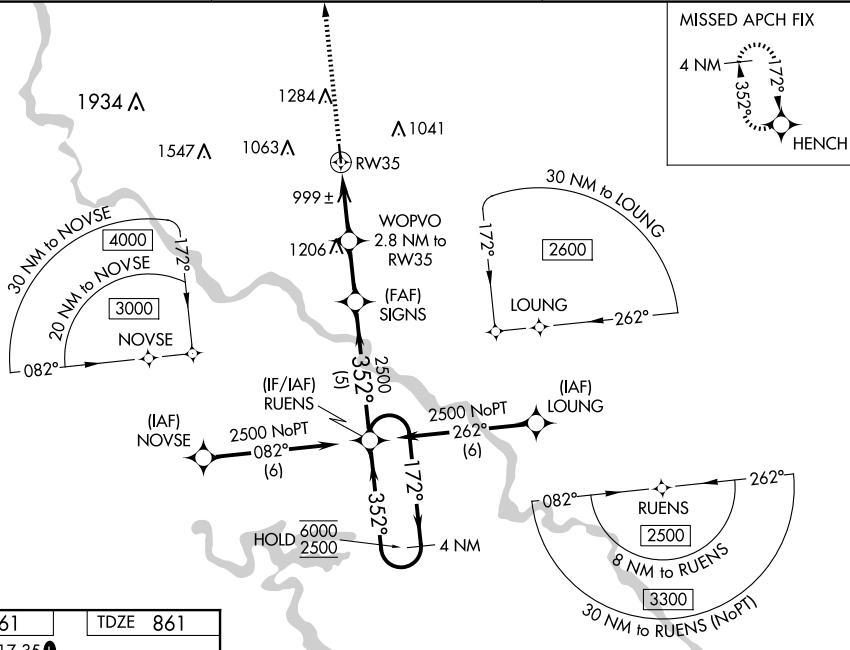

|                         |          |
|-------------------------|----------|
| ELEV 861                | TDZE 861 |
| MIRL Rwy 17-35 <b>L</b> |          |

