


WAAS CH 61200 W18A	APP CRS 186°	Rwy Ldg 7001 TDZE 84 Apt Elev 89	RNAV (GPS) RWY 18 ALEXANDRIA INTL (AEX)
--	------------------------	---	---

▼ DME/DME RNP-0.3 NA. Radar required when R-3801 A-B in use. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (119°F). Visibility reduction by helicopters NA.	⚠ MISSED APPROACH: Climb to 4000 direct HIPKU and via 105° track to MUSHE and hold.
---	---

ASOS 123.975	POLK APP CON 125.4 254.8	ALEXANDRIA TOWER 127.35 (CTAF) 269.2	GND CON 121.9 372.0	CLNC DEL 121.9
------------------------	------------------------------------	--	-------------------------------	--------------------------

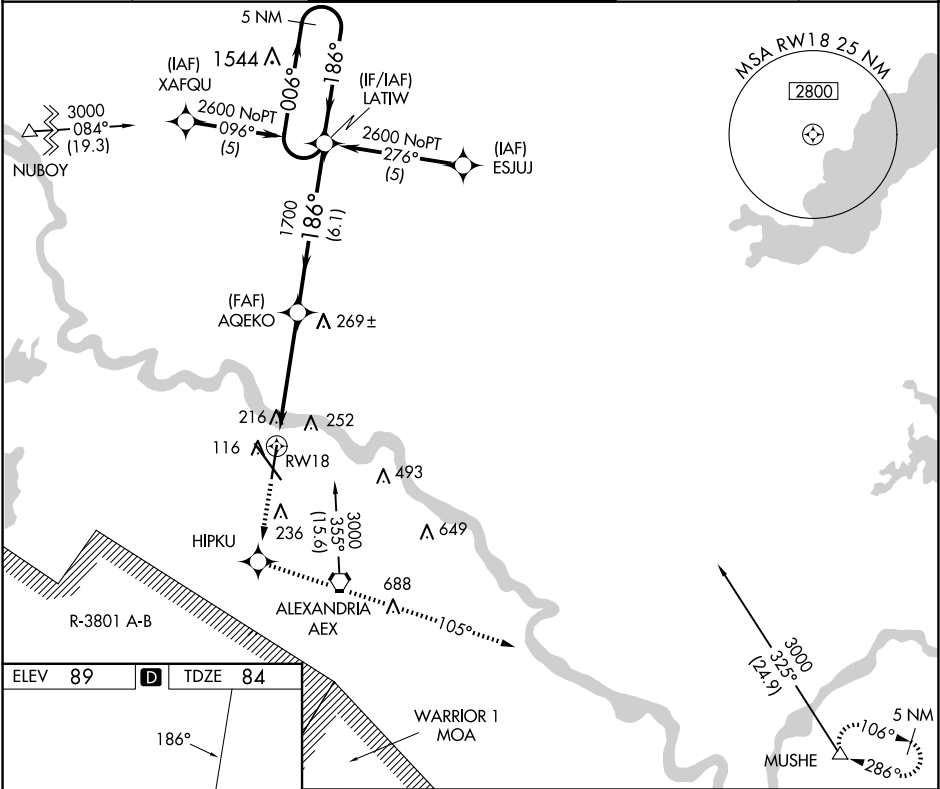

TDZL Rwy 14
REIL Rwys 18, 32 and 36
HIRL Rwys 18-36 and 14-32

				5 NM Holding Pattern
	tr 105°			
*LNAV only.	*1.2 NM to RW18	AGEKO	186°	LATW 006° → 2600 ← 186°
			1700	GP 3.00° TCH 55°
				VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 79).
	1.2	3.6 NM	6.1 NM	
CATEGORY	A	B	C	D
LPV DA		395-1	311 (400-1)	
LNAV/VNAV DA		539-1½	455 (500-1½)	
LNAV MDA	520-1	436 (500-1)	520-1¼ 436 (500-1¼)	520-1½ 436 (500-1½)
CIRCLING	540-1 451 (500-1)	560-1 471 (500-1)	700-1¾ 611 (700-1¾)	860-2½ 771 (800-2½)