

LOC/DME I-HFW <b>109.3</b> Chan <b>30</b>	APP CRS <b>095°</b>	Rwy Ldg TDZE Apt Elev	8L <b>8800</b> <b>1015</b> <b>1026</b>	8R <b>9999</b> <b>1024</b> <b>1026</b>
---	------------------------	-----------------------------	---	---

# ILS or LOC RWY 8L

HARTSFIELD/JACKSON ATLANTA INTL (ATL)




RADAR required for procedure entry. DME or RADAR required.  
 Simultaneous approach authorized.  
 Inop table does not apply to sidestep 8R.





MISSED APPROACH: Climb to 1500 then climbing left turn to 3500 on heading 360° and RMG VORTAC R-115 to TROYS/RMG 38.1 DME/RADAR and hold.

D-ATIS ARR <b>119.65</b>	ATLANTA APP CON DEP <b>125.55</b> <b>127.9</b> <b>379.9</b>	ATLANTA TOWER				ALL RWYS	GND CON	ALL RWYS
		8L-26R	8R-26L	9L-27R	9R-27L	10-28	(8L-26R, 8R-26L) (9L-27R, 9R-27L)	10-28
		<b>119.1</b>	<b>125.325</b>	<b>123.85</b>	<b>119.3</b>	<b>119.5</b>	<b>254.4</b>	<b>121.9</b>
								<b>121.75</b> <b>121.65</b> <b>254.4</b>

CLNC DEL	CPDLC
<b>118.1</b>	

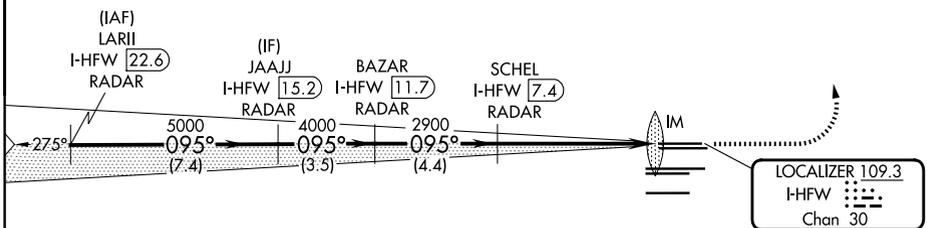

ELEV 1026	TDZE 8L 1015	TDZE 8R 1024
-----------	--------------	--------------

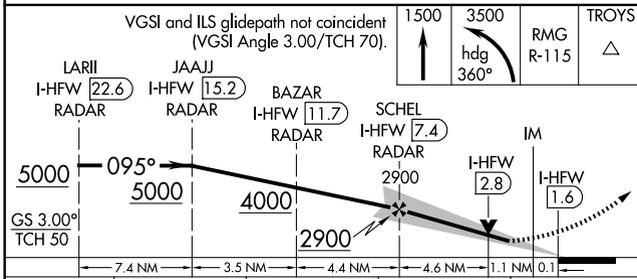

CATEGORY	A	B	C	D
S-ILS 8L	1215/18		200 (200-½)	
S-LOC 8L	1460/24	445 (500-½)	1460/45	445 (500-¾)
SIDESTEP 8R	1460/55	436 (500-1)	1460-1½ 436 (500-1½)	1460-2 436 (500-2)

HRTL all Rwys TDZ/CL Rwys 8L, 9R, 10, 26R, 27L and 28					
FAF to MAP 5.8 NM					
Knots	60	90	120	150	180
Min:Sec	5:48	3:52	2:54	2:19	1:56

SE-4, 19 FEB 2026 to 19 MAR 2026

SE-4, 19 FEB 2026 to 19 MAR 2026