




WAAS CH <b>65700</b> <b>W27A</b>	APP CRS <b>275°</b>	Rwy Ldg <b>8865</b> TDZE <b>999</b> Apt Elev <b>1026</b>
--	------------------------	--

# RNAV (GPS) RWY 27L


HARTSFIELD/JACKSON ATLANTA INTL (ATL)

<p>▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C (20°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Simultaneous approach authorized with Rwy 26R or 26L. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.</p>		<p>ALSF-2</p>	<p>MISSED APPROACH: Climb to 4000 direct CALUP and on track 272° to TEMPO and hold.</p>		
D-ATIS ARR <b>119.65</b>	ATLANTA APP CON <b>127.9 379.9</b>	ATLANTA TOWER 8L-26R 8R-26L 9L-27R 9R-27L 10-28 RWYS <b>119.1 125.325 123.85 119.3 119.5 254.4</b>	ALL RWYS <b>121.9</b>	GND CON (8L-26R,8R-26L) (9L-27R,9R-27L) 10-28 RWYS <b>121.75 121.65 254.4</b>	ALL RWYS

CLNC DEL	CPDLC
<b>118.1</b>	




ELEV 1026	<b>D</b>	TDZE 999
-----------	----------	----------

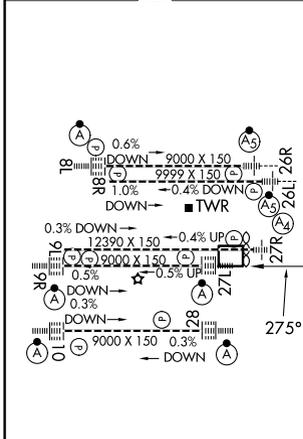

HIRL all Rwy's  
TDZ/CL Rwy's 8L, 9R, 10, 26R, 27L and 28

## RADAR REQUIRED

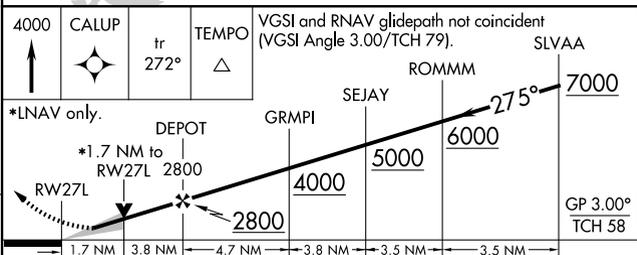

CATEGORY	A	B	C	D
LPV DA	1199/18		200 (200-½)	
LNAV/VNAV DA	1528-1⅓		529 (600-1⅓)	
LNAV MDA	1620/24	621 (600-½)	1620-1⅓	621 (600-1⅓)

SE-4, 19 FEB 2026 to 19 MAR 2026

SE-4, 19 FEB 2026 to 19 MAR 2026