| WAAS CH 56411 W23A | APP CRS 227° | Rwy Ldg 10004 TDZE 929 Apt Elev 952 |
|---|---|---|

# RNAV (GPS) RWY 23R
## BATTLE CREEK EXEC AT KELLOGG FLD (BTL)

RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. Circling to Rwy 5R, 23L and 31 NA at night. When local altimeter setting not received, use Grand Rapids altimeter setting: increase all LPV DA to 1236 feet and LNAV/VNAV DA to 1365 feet and visibility to RVR 5000 all Cats; increase all MDA 120 feet, LNAV Cats C and D visibility to 1¼ SM and Circling Cat C visibility to 2 SM and Cat D visibility to 2½ SM. For inop ALS when using Grand Rapids altimeter setting, increase LPV all Cats visibility to RVR 5000 and LNAV Cats C and D to visibility 1⅝ SM. Baro-VNAV and VDP NA when using Grand Rapids altimeter setting. *RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 2500 direct WEVSO and hold.

| ATIS | GREAT LAKES APP CON* | BATTLE CREEK TOWER* | GND CON | UNICOM |
|---|---|---|---|---|
| 128.325 | 119.2 239.25 | 126.825 L (CTAF) | 121.7 | 122.95 |

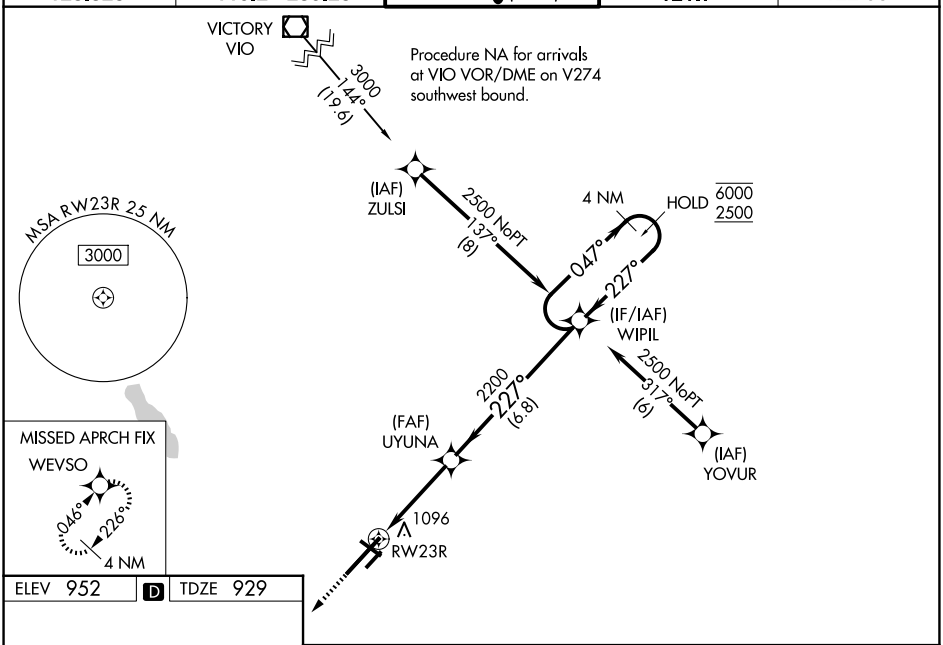


ELEV 952 D TDZE 929

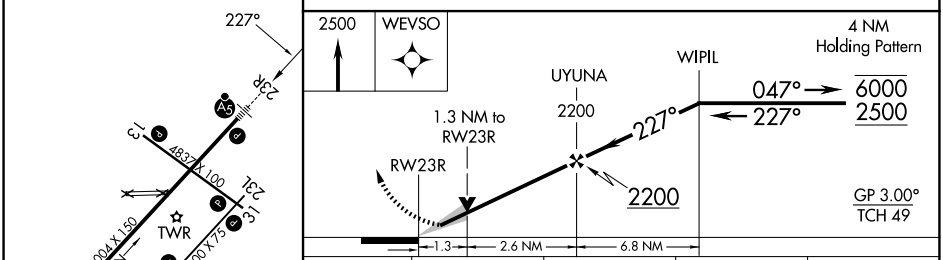


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA * | 1129/24 200 (200-½) | | | |
| LNAV/VNAV DA | 1258/32 329 (400-⅝) | | | |
| LNAV MDA | 1380/24 451 (500-½) | | 1380/45 451 (500-⅞) | |
| CIRCLING | 1420-1 468 (500-1) | 1480-1 528 (600-1) | 1520-1½ 568 (600-1½) | 1520-2 568 (600-2) |

HIRL Rwy 5L-23R L
MIRL Rwy 13-31 and 5R-23L L
REIL Rwys 5L, 5R, 13, 23L and 31 L



EC-1, 19 FEB 2026 to 19 MAR 2026
EC-1, 19 FEB 2026 to 19 MAR 2026