
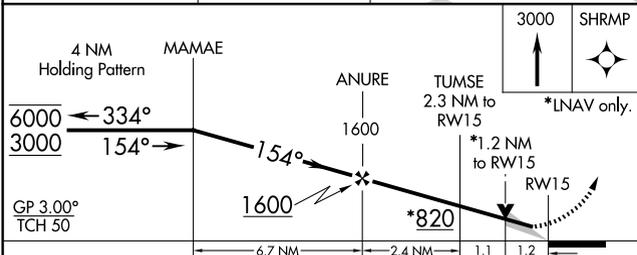


WAAS CH 93519 W15A	APP CRS 154°	Rwy Ldg TDZE Apt Elev	9001 43 46
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) Y RWY 15

CHARLESTON AFB/INTL (CHS)

RNP APCH.		ALSIF-2		MISSED APPROACH: Climb to 3000 direct SHRMP and hold.	
⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -5°C or above 54°C. For inop ALS, increase LNAV Cat C/D visibility to RVR 6000.					
D-ATIS	CHARLESTON APP CON	CHARLESTON TOWER	GND CON	CLNC DEL	CPDLC
124.75	120.7 306.925	126.0 239.0	121.9 348.6	127.325 291.65	

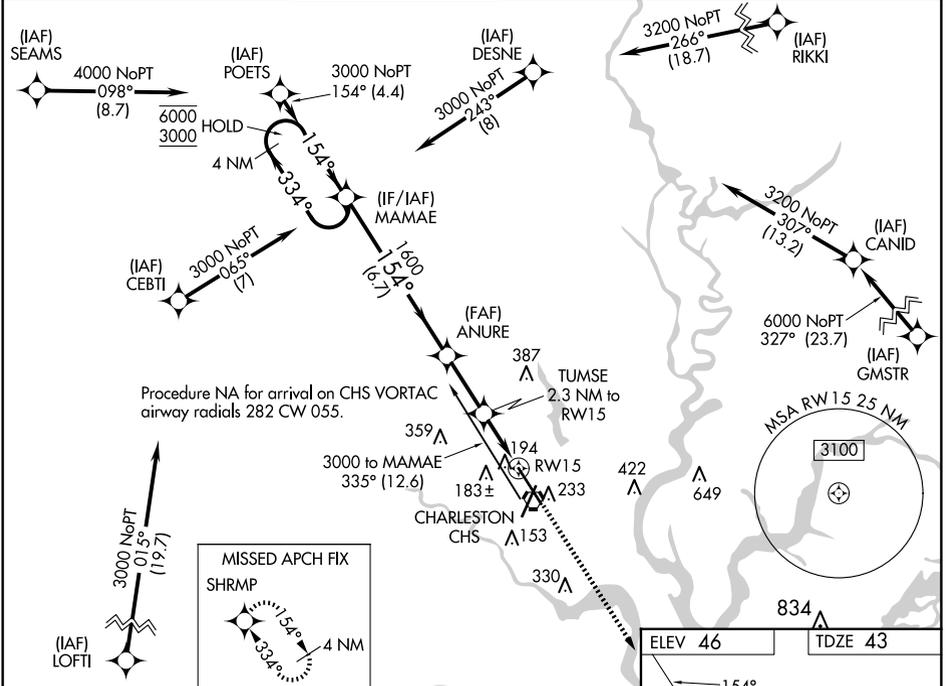

ELEV 46	TDZE 43
TDZ/CL Rwy 15 REIL Rws 3 and 21 HIRL Rws 3-21 and 15-33	

CATEGORY	A	B	C	D
LPV DA		243/18	200 (200-½)	
LNAV/VNAV DA		375/26	332 (400-½)	
LNAV MDA	460/24	417 (500-½)	460/40	417 (500-¾)
CIRCLING	540-1	494 (500-1)	540-1½ 494 (500-1½)	740-2¼ 694 (700-2¼)

SE-2, 19 FEB 2026 to 19 MAR 2026

SE-2, 19 FEB 2026 to 19 MAR 2026