

LOC/DME I-PVY 111.55	APP CRS 238°	Rwy Ldg TDZE Apt Elev	24R 9000 780 799	24L 9956 786 799
Chan 52 (Y)				

ILS or LOC RWY 24R


CLEVELAND-HOPKINS INTL (CLE)

DME required. Aircraft not DME/DME/IRU or GPS equipped - RADAR required for procedure entry. RNAV 1. From LLROY and BUDRW: RNAV 1-DME/DME/IRU or GPS required for procedure entry.

▼ Circling Rwy 10 NA at night. Simultaneous approach authorized. Simultaneous operations require use of vertical guidance; maintain last assigned altitude until established on glide slope. Inop table does not apply to sidestep 24L. For inop ALS, increase S-LOC 24R Cats C/D visibility to RVR 5500.

Rwy 24L MALSR 	Rwy 24R ALSF-2 	MISSED APPROACH: Climb to 1700 then climbing right turn to 3000 direct DJB VOR/DME and hold.
----------------------	-----------------------	--

D-ATIS 127.85	CLEVELAND APP CON 126.55 346.325	CLEVELAND TOWER 124.5 273.45	GND CON 121.7 273.45
-------------------------	--	--	--------------------------------


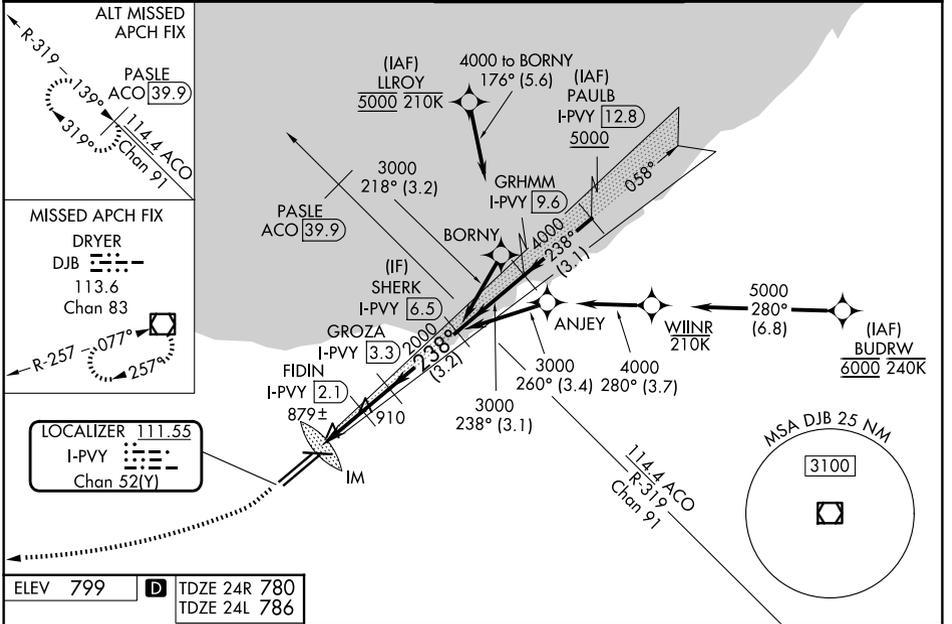


MISSED APCH FIX DRYER
DJB
113.6
Chan 83

ALT MISSED APCH FIX
PASLE ACO 39.9
114.4 ACO
Chan 91

LOCALIZER 111.55
I-PVY
Chan 52(Y)

ELEV 799	D TDZE 24R 780	TDZE 24L 786
----------	-----------------------	--------------

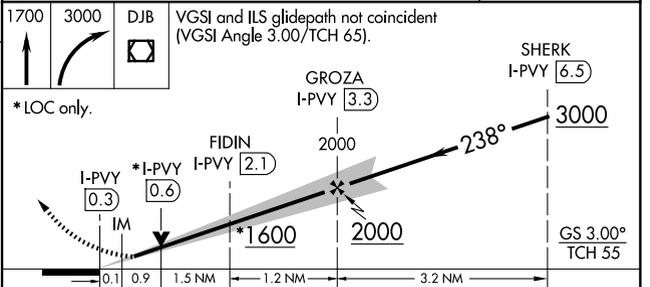

CATEGORY	A	B	C	D
S-ILS 24R	980/18		200 (200-½)	
S-LOC 24R	1160/24	379 (400-½)	1160/35	379 (400-¾)
SIDESTEP 24L	1280/55	494 (500-1)	1280-1½ 494 (500-1½)	1280-2 494 (500-2)
CIRCLING	1420-1	621 (700-1)	1420-1¾ 621 (700-1¾)	1420-2 621 (700-2)

REIL Rwy 10
TDZ/CL Rwy 6L, 6R, 24L and 24R
HIRL Rwy 6L-24R, 6R-24L and 10-28

EC-2, 19 FEB 2026 to 19 MAR 2026

EC-2, 19 FEB 2026 to 19 MAR 2026