

# RNAV (RNP) Z RWY 6L

CLEVELAND-HOPKINS INTL (CLE)

APP CRS <b>058°</b>	Rwy Ldg <b>9000</b>
	TDZE <b>773</b>
	Apt Elev <b>799</b>

RNP AR APCH.

**⚠** For uncompensated Baro-VNAV systems, procedure NA below -18°C (0°F) or above 54°C (130°F). For inop ALS, increase RNP 0.17 all Cats visibility to RVR 5500 and RNP 0.30 all Cats visibility to RVR 6000.

ALSF-2



**⚠** MISSED APPROACH: Climb to 3000 direct ACAPO and on track 001° to PASLE and hold.

D-ATIS  
**127.85**


CLEVELAND APP CON  
**126.55 346.325**

CLEVELAND TOWER  
**124.5 273.45**

GND CON  
**121.7 273.45**

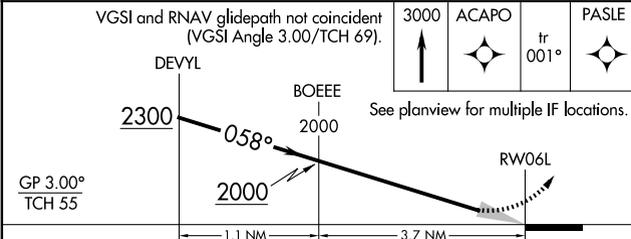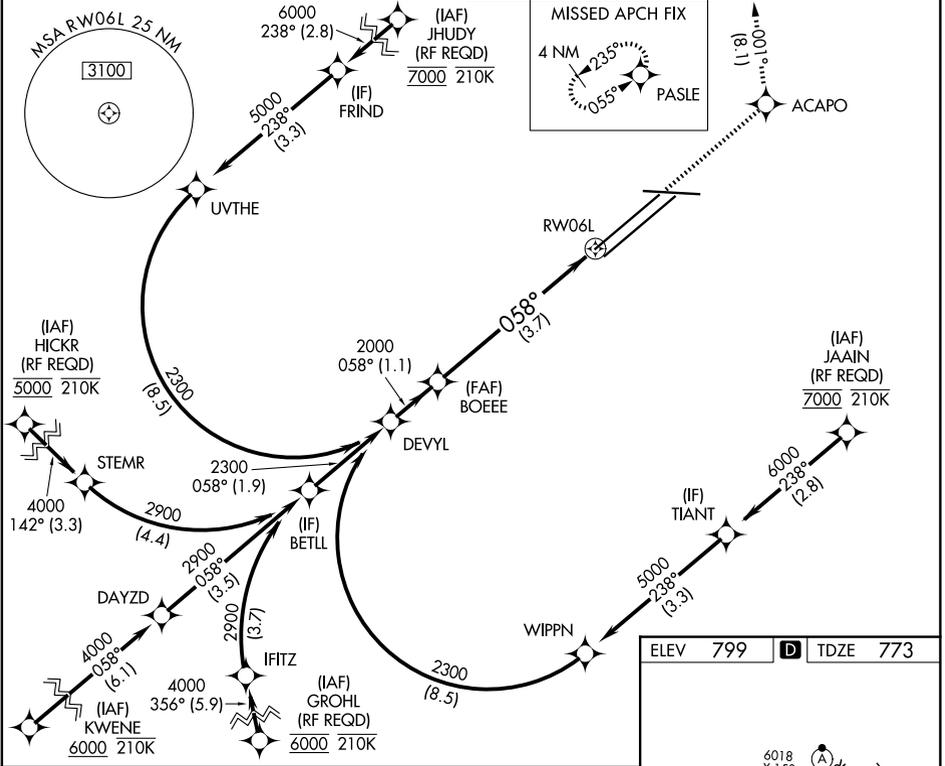

ELEV 799	<b>D</b> TDZE 773
----------	-------------------



CATEGORY	A	B	C	D
RNP 0.17 DA		1123/30	350 (400-5%)	
RNP 0.30 DA		1176/40	403 (400-3/4)	

**AUTHORIZATION REQUIRED**

REIL Rwy 10  
TDZ/CL Rwy 6L, 6R, 24L, and 24R  
HIRL Rwy 6L-24R, 6R-24L and 10-28

EC-2, 19 FEB 2026 to 19 MAR 2026

EC-2, 19 FEB 2026 to 19 MAR 2026