

| | | | |
|---------------------------|------------------------|-----------------------------|--|
| LOC I-COS 109.9 | APP CRS 352° | Rwy Ldg TDZE Apt Elev | 11022 6075 6187 |
|---------------------------|------------------------|-----------------------------|--|

ILS or LOC RWY 35L

CITY OF COLORADO SPRINGS MUNI (COS)


ADF required for LOC only.

⚠ RADAR monitoring required when R-2601 in use. For inop ALS, increase S-LOC 35L Cat C/D visibility to RVR 4500.
*RVR 1800 authorized with use of FD or AP or HUD to DA.


MALSR 

MISSED APPROACH: Climb to 6700 then climbing right turn to 9000 on heading 047° and BRK VOR/DME R-091 to ADANE INT/BRK 11.1 DME and hold.

| | | | | |
|----------------------------|---|-------------------------------------|-------------------------------|-----------------------------------|
| ATIS 125.0 254.3 | SPRINGS APP CON 124.0 257.875 | SPRINGS TOWER 119.9 360.6 | GND CON 121.7 348.6 | CLNC DEL 134.45 363.125 |
|----------------------------|---|-------------------------------------|-------------------------------|-----------------------------------|

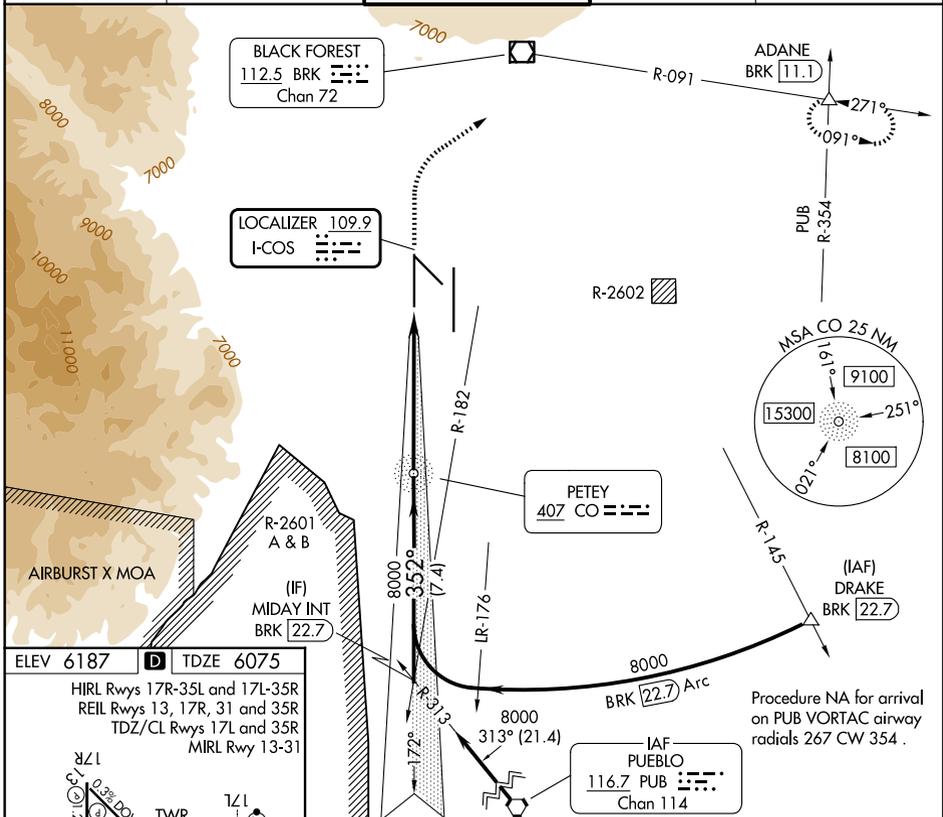

| | | | | | |
|--|----------|-----------|------|------|------|
| ELEV 6187 | D | TDZE 6075 | | | |
| HIRL Rwy 17R-35L and 17L-35R REIL Rwy 13, 17R, 31 and 35R TDZ/CL Rwy 17L and 35R MIRL Rwy 13-31 | | | | | |
| | | | | | |
| FAF to MAP 6 NM | | | | | |
| Knots | 60 | 90 | 120 | 150 | 180 |
| Min:Sec | 6:00 | 4:00 | 3:00 | 2:24 | 2:00 |

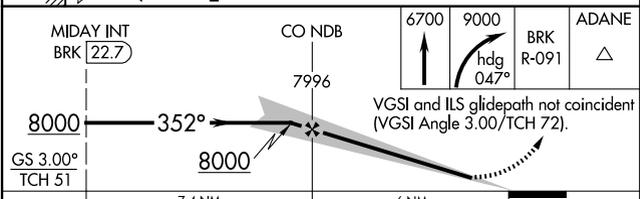

| | | | | |
|------------|-------------|-------------|--------------|---------------|
| CATEGORY | A | B | C | D |
| S-ILS 35L* | 6275/24 | | 200 (100-½) | |
| S-LOC 35L | 6340/24 | | 265 (200-½) | |
| CIRCLING | 6740-1 | 6760-1 | 6980-2¼ | 7240-3 |
| | 553 (600-1) | 573 (600-1) | 793 (800-2¼) | 1053 (1100-3) |

SW-1, 19 FEB 2026 to 19 MAR 2026

SW-1, 19 FEB 2026 to 19 MAR 2026