


WAAS CH 69618 W17A	APP CRS 172°	Rwy Ldg 13500 TDZE 6187 Apt Elev 6187
--	------------------------	--

RNAV (GPS) Y RWY 17L
CITY OF COLORADO SPRINGS MUNI (COS)

RNP APCH - GPS.		MALSR		MISSED APPROACH: Climb to 9000 direct CEGIX and on track 100° to DRAKE and hold.	
 For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 44°C. For non LNAV, increase LNAV Cat C/D visibility to 2 1/2 SM.					
ATIS 125.0 254.3		SPRINGS APP CON 124.0 257.875		SPRINGS TOWER 119.9 360.6	
				GND CON 121.7 348.6	
				CLNC DEL 134.45 363.125	

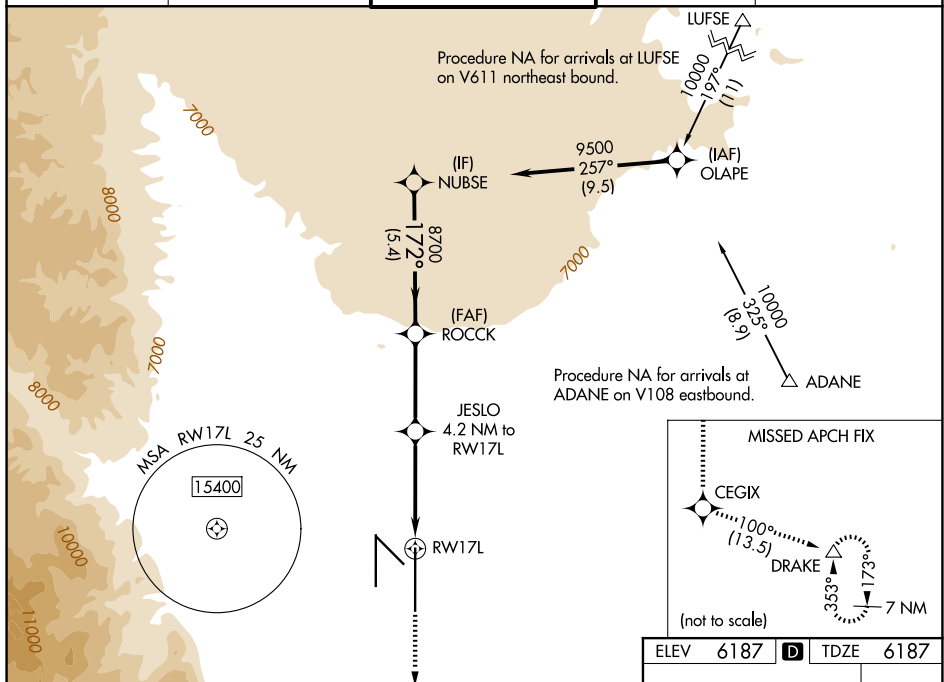

9000

↑

CEGIX

✱

tr
100°

DRAKE

△

ROCCK

8700

NUBSE

8900

JESLO

4.2 NM to RW17L

2.4 NM to RW17L

7580

172°

8700

GP 3.00°
TCH 57°

RW17L

2.4 NM

1.8 NM

3.5 NM

5.4 NM

CATEGORY	A	B	C	D
LPV DA	6387/18		200 (200-½)	
LNAV/VNAV DA	6602/45		415 (500-¾)	
LNAV MDA	7000/24 813 (900-½)	7000/40 813 (900-¾)	7000-178	813 (900-1⅞)
CIRCLING	7000-1¼	813 (900-1¼)	7040-2 ½ 853 (900-2 ½)	7260-3 1073 (1100-3)

