


WAAS CH 86619 W28B	APP CRS 281°	Rwy Ldg TDZE Apt Elev	8000 813 815
--	------------------------	-----------------------------	---

RNAV (GPS) Y RWY 28R


JOHN GLENN COLUMBUS INTL (CMH)

RNP APCH. ▼ Simultaneous approach authorized. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. LNAV procedure NA during simultaneous operations. ▲ Use of FD or AP providing RNAV track guidance required during simultaneous operations. For inop ALS, increase LNAV/VNAV all Cats visibility or RVR 4500; increase LNAV Cat C/D visibility to 1 3/8 SM. #RVR 1800 authorized with use of FD or AP or HUD to DA.	MALSR 	MISSED APPROACH: Climb to 1400 then climbing right turn to 3000 direct APE VORTAC and hold.
---	-----------	--

D-ATIS 124.6	COLUMBUS APP CON 125.95 371.975	COLUMBUS TOWER 132.7 257.8	GND CON 121.9 348.6
------------------------	---	--------------------------------------	-------------------------------

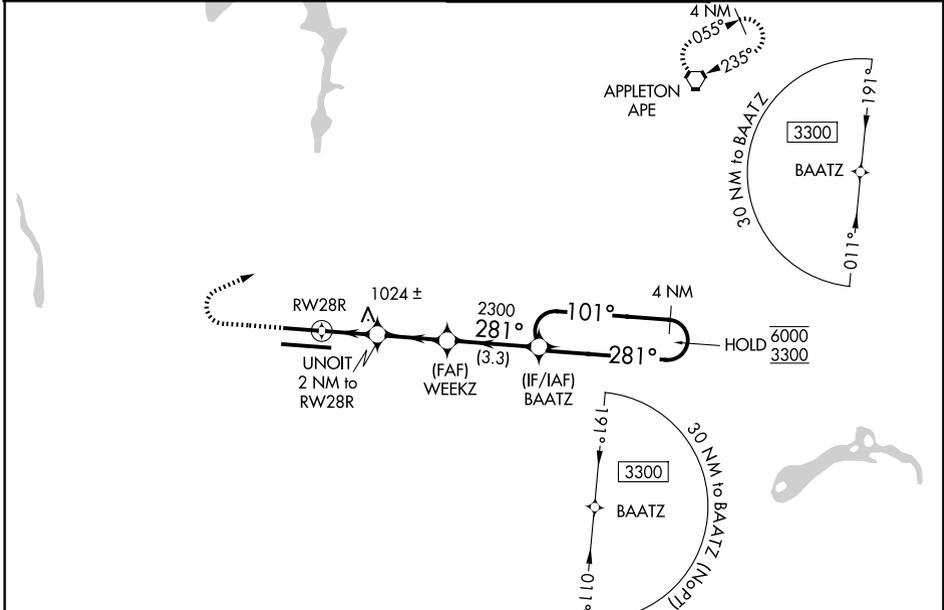

ELEV 815	D	TDZE 813
----------	----------	----------

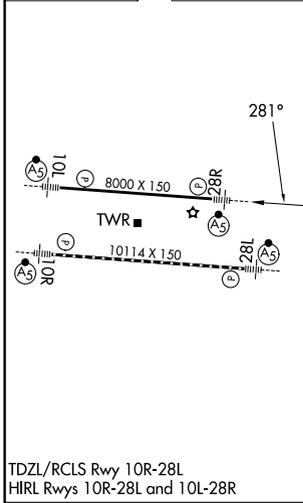

1400	3000	APE	4 NM	BAATZ	Holding Pattern
*LNAV only.		UNOIT 2 NM to RW28R	WEEKZ 2300	101°	6000
RW28R		*1.3 NM to RW28R	281°	281°	3300
1.3 NM		0.7 NM	2.5 NM	3.3 NM	GP 3.00°
1480*					TCH 50
CATEGORY	A	B	C	D	
LPV DA #	1013/24 200 (200-1/2)				
LNAV/VNAV DA	1096/24 283 (300-1/2)				
LNAV MDA	1280/24	467 (500-1/2)	1280/50	467 (500-1)	
CIRCLING	1340-1	525 (600-1)	1520-2 705 (800-2)	1520-2 1/4 705 (800-2 1/4)	

COLUMBUS, OHIO
Amdt 3 22APR21

JOHN GLENN COLUMBUS INTL (CMH)
40°00'N-82°54'W
RNAV (GPS) Y RWY 28R

EC-2, 19 FEB 2026 to 19 MAR 2026

EC-2, 19 FEB 2026 to 19 MAR 2026