

LOC I-ATD 108.9	APP CRS 061°	Rwy Ldg TDZE Apt Elev	10900 998 1009
---------------------------	------------------------	-----------------------------	---



ILS or LOC RWY 6L

JAMES M COX DAYTON INTL (DAY)


▽ Simultaneous approach authorized.
▲ For inop ALSF-2, increase S-LOC 6L Cat C/D visibility to 1½ mile.

ALSF-2 MISSED APPROACH: Climb to 2000 then climbing left turn to 3000 direct DQN VOR/DME and hold.

ATIS 125.8	COLUMBUS APP CON 134.45 323.15	DAYTON TOWER 119.9 257.7	GND CON 121.9
----------------------	--	------------------------------------	-------------------------

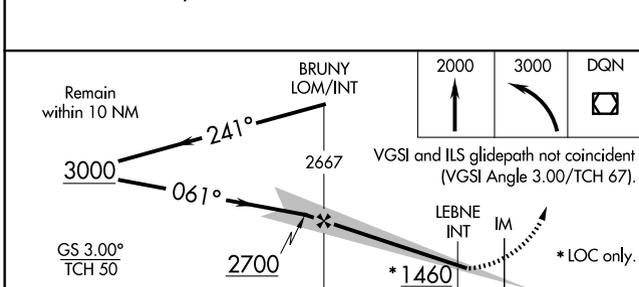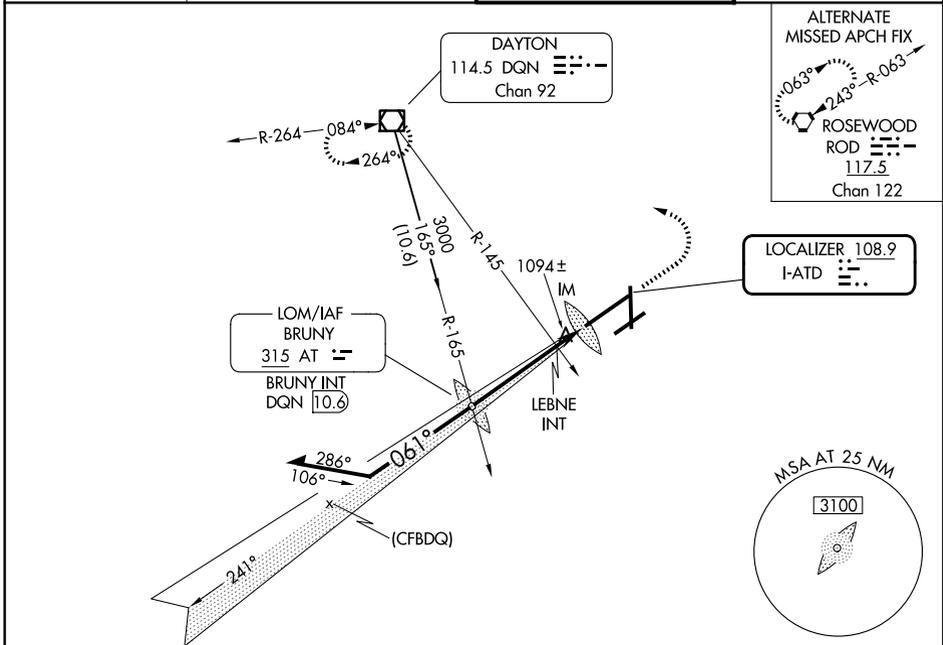

CATEGORY	ELEV 1009 TDZE 998			
	A	B	C	D
S-ILS 6L	1198/18 200 (200-½)			
S-LOC 6L	1460/24	462 (500-½)	1460/50	462 (500-1)
CIRCLING	1580-1	571 (600-1)	1580-1½	1640-2
LEBNE FIX MINIMUMS (DUAL VOR RECEIVERS REQUIRED)				
S-LOC 6L	1380/24	382 (400-½)	1380/35	382 (400-¾)
CIRCLING	1580-1	571 (600-1)	1580-1½	1640-2
			571 (600-1½)	631 (700-2)

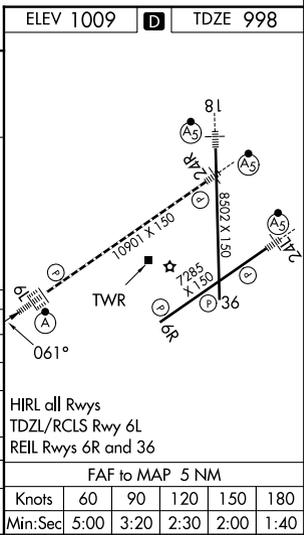

EC-2, 19 FEB 2026 to 19 MAR 2026

EC-2, 19 FEB 2026 to 19 MAR 2026