

APP CRS 216°	Rwy Ldg 12003 TDZE 637 Apt Elev 645
------------------------	--

RNAV (RNP) X RWY 22L
DETROIT METRO WAYNE COUNTY (DTW)

RNP AR APCH.


T For uncompensated Baro-VNAV systems, procedure NA below -10°C (14°F) or above 54°C (130°F). Simultaneous approach authorized. For inop ALS, increase RNP 0.15 all Cats visibility to RVR 4500 and RNP 0.30 all Cats visibility to RVR 6000.


MALSR



MISSED APPROACH:
Climb to 4000 direct
HWLER and hold.

D-ATIS 133.675	DETROIT APP CON 124.05 284.0	METRO TOWER 128.125 317.725	GND CON 121.8 (NW) 119.45 (NE) 132.725 (SW) 119.25 (SE)	CLNC DEL 120.65	CPDLC
--------------------------	--	---------------------------------------	---	---------------------------	-------

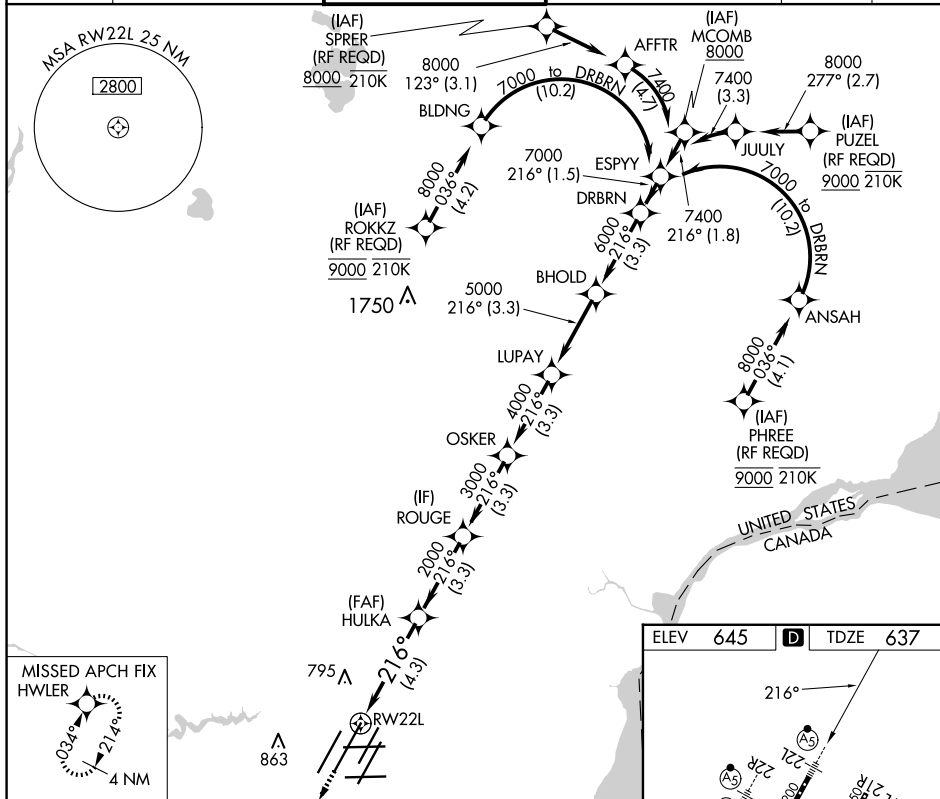

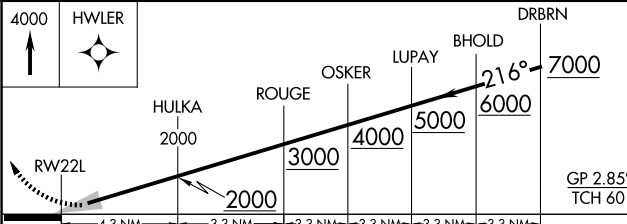4000 ↑		HWLER ✦													
RW22L		HULKA 2000		ROUGE 3000		OSKER 4000		LUPAY 5000		BHOLD 6000 216°		7000		GP 2.85° TCH 60	
		4.3 NM		3.3 NM		3.3 NM		3.3 NM		3.3 NM					
CATEGORY		A		B		C						D			
RNP 0.15 DA				941/24		304 (300-½)									
RNP 0.30 DA				1040/40		403 (400-¾)									
AUTHORIZATION REQUIRED															

