

LOC I-ELM	APP CRS	Rwy Ldg	<b>7799</b>
<b>109.1</b>	<b>242°</b>	TDZE	<b>955</b>
		Apt Elev	<b>955</b>

# ILS or LOC RWY 24


ELMIRA/CORNING RGNL (ELM)

RADAR required to define ERINN. RNAV 1-GPS required from MAP to UNOLY.  
RNAV-1 GPS required for procedure entry. ADF or RADAR required.



**MALSR**  
Climb to 4000 direct UNOLY/RADAR and hold.  
\*\* Missed approach requires minimum climb of 260 feet per NM to 2400.

**⚠** Circling NA for Cat D south of Rwy 10 and 28. Inop table does not apply to S-LOC 24 Cats C/D. Circling NA to Rwys 5 and 23. Circling Rwy 10 NA at night.  
**⚠** For inop ALS increase S-ILS 24 all Cats visibility to RVR 6000.  
**⚠** -21°C  
\*\* S-ILS 24 RVR 1800 authorized with use of FD or AP or HUD to DA.

ATIS	ELMIRA APP CON *	ELMIRA TOWER *	GND CON	CLNC DEL	UNICOM
<b>125.475</b>	<b>128.425 257.8</b>	<b>121.1 (CTAF) 0 257.8</b>	<b>121.9</b>	<b>121.9</b>	<b>122.95</b>

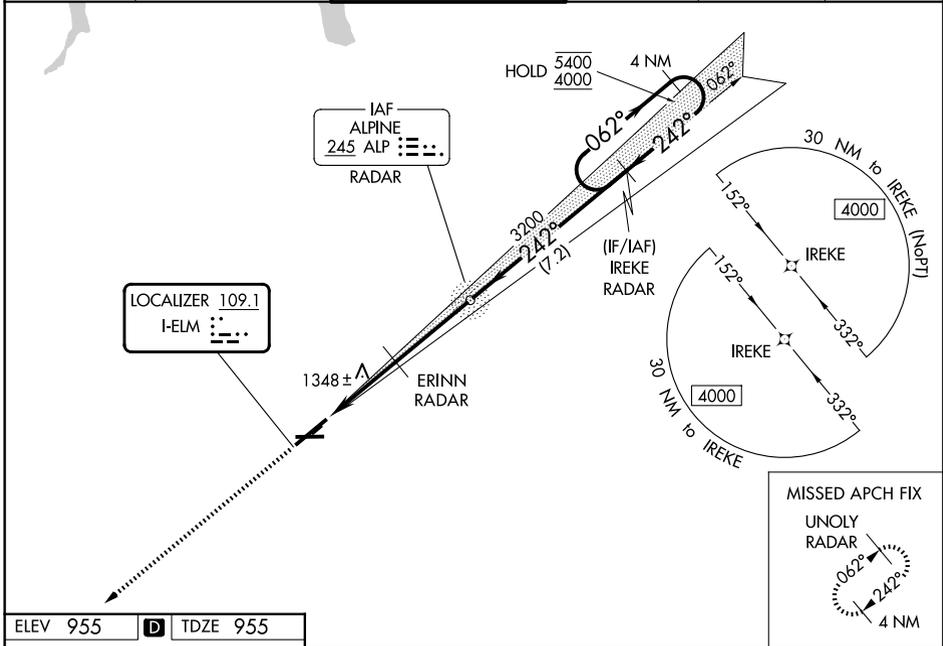

ELEV 955	<b>D</b>	TDZE 955
----------	----------	----------

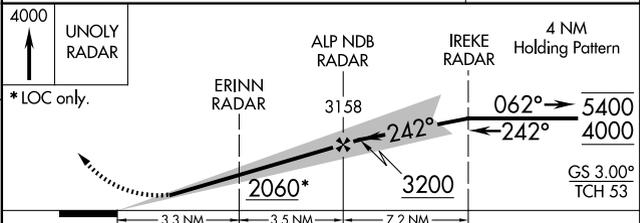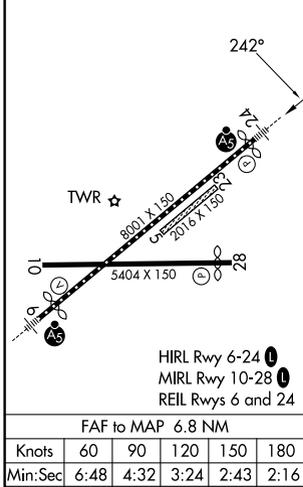

CATEGORY	A	B	C	D
S-ILS 24 **		1155/24	200 (200-½)	
S-ILS 24		1340/35	385 (400-⅙)	
S-LOC 24	2060/40 1105 (1200-¾)	2060/55 1105 (1200-1)	2060-3	1105 (1200-3)
CIRCLING	2060-1¼ 1105 (1200-1¼)	2080-1½ 1125 (1200-1½)	2100-3 1145 (1200-3)	2340-3 1385 (1400-3)
ERINN FIX MINIMUMS				
S-LOC 24	1600/24	645 (700-½)	1600-1⅓	645 (700-1⅓)
CIRCLING	2020-1¼ 1065 (1100-1¼)	2080-1½ 1125 (1200-1½)	2100-3 1145 (1200-3)	2340-3 1385 (1400-3)

NE-2, 19 FEB 2026 to 19 MAR 2026

NE-2, 19 FEB 2026 to 19 MAR 2026