





LOC I-AAM 108.9	APP CRS 176°	Rwy Ldg TDZE Apt Elev 9001 900 901
---------------------------	------------------------	--

ILS or LOC RWY 18

HECTOR INTL (FAR)

ADF or DME required for procedure entry.	MALSR 	MISSED APPROACH: Climb to 2500 direct FAR VOR/DME and hold.
<p>For inop MALSR, increase S-ILS 18 Cat E visibility to RVR 4000, and S-LOC 18 Cat E visibility to RVR 5000.</p> <p>* Visibility Cat A/B/C/D RVR 1800 authorized with the use of FD or AP or HUD to DA.</p>		

ATIS 124.5 379.2	FARGO APP CON 120.4 377.15	FARGO TOWER 133.8 290.4	GND CON 121.9 348.6
----------------------------	--------------------------------------	-----------------------------------	-------------------------------

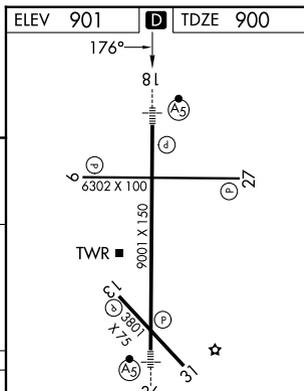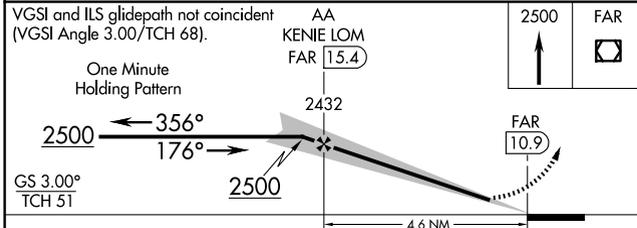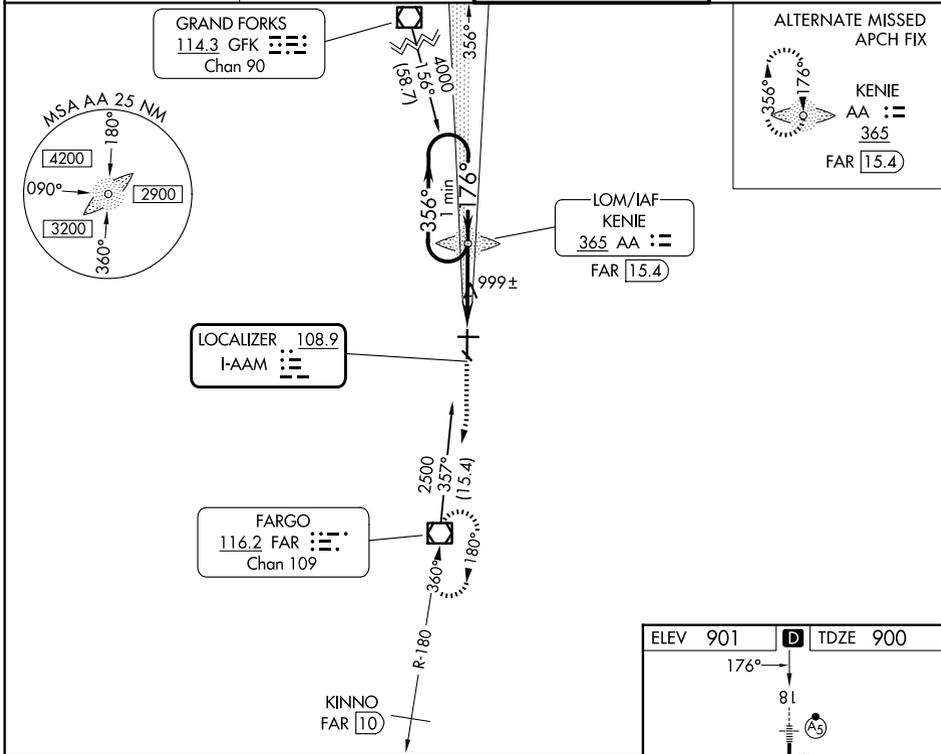

CATEGORY	A	B	C	D	E
S-ILS 18*	1100/24 200 (200-½)				
S-LOC 18	1260/24	360 (400-½)	1260/40 360 (400-¾)		
CIRCLING	1380-1 479 (500-1)	1520-1¾ 619 (700-1¾)	1620-2¼ 719 (800-2¼)	1620-2½ 719 (800-2½)	

HRL Rwy 18-36	REIL Rwys 9 and 27	MRL Rwys 9-27 and 13-31			
FAF to MAP 4.6 NM					
Knots	60	90	120	150	180
Min:Sec	4:36	3:04	2:18	1:50	1:32

NC-1, 19 FEB 2026 to 19 MAR 2026

NC-1, 19 FEB 2026 to 19 MAR 2026