


WAAS CH 93839 W28E	APP CRS 275°	Rwy Ldg TDZE Apt Elev	7500 667 680
--	------------------------	-----------------------------	---

RNAV (GPS) Y RWY 28L

CHICAGO O'HARE INTL (ORD)

RNP APCH		MISSED APPROACH: Climb to 1200 then climbing left turn to 4000 direct CGT VORTAC and hold.	
Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. Use of FD or AP required during simultaneous operations.		ALSF-2 	(TWR CENTER) 121.75 (OBND) 121.9 (IBND)
D-ATIS 135.4 282.225	CHICAGO APP CON 119.0 292.125	O'HARE TOWER 133.0 348.0	GND CON (TWR NORTH) 124.125 (TWR SOUTH) 118.05 (ALL TWRS) 226.675
			CLNC DEL 121.6 CPDLC

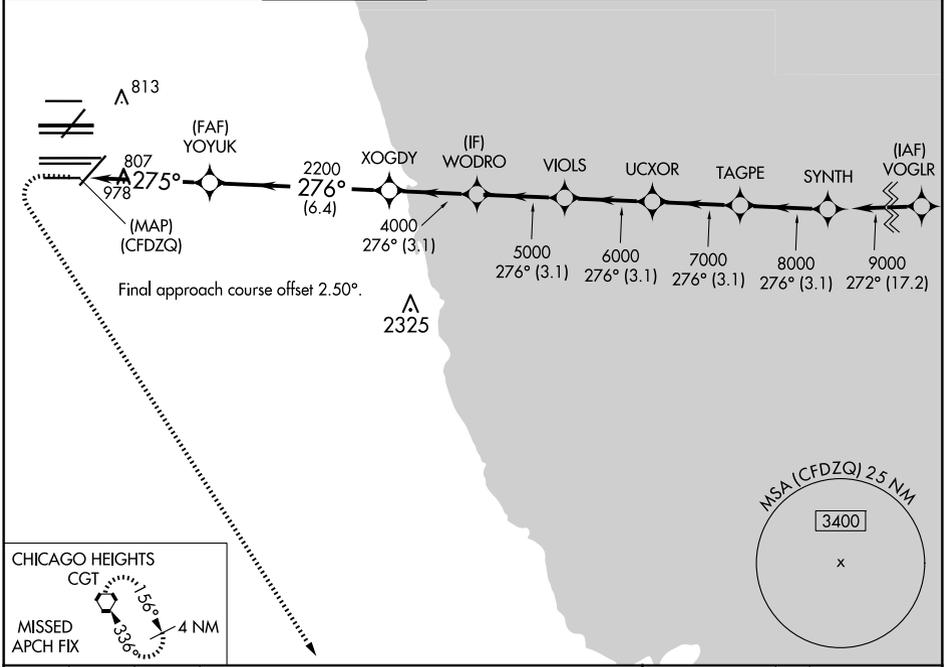

1200 ↑ 4000 ↙ CGT 4 NM	SYNTH 9000 TAGPE 8000 UCXOR 7000 VIOLS 6000 WODRO 5000 XOGDY 4000 YOYUK 2200 2200	*LNAV only *1.1 NM to (CFDZQ)		
1.1 3.6 NM 6.4 NM 3.1 NM 3.1 NM 3.1 NM 3.1 NM 3.1 NM	275° 276° (6.4) 276° (3.1) 276° (3.1) 276° (3.1) 276° (3.1) 276° (3.1) 276° (3.1) 272° (17.2)	GP 3.00° TCH 55		
CATEGORY	A	B	C	D
LPV DA	917/24		250 (300-½)	
LNAV/VNAV DA	1090/40		423 (500-¾)	
LNAV MDA	1060/24	393 (400-½)	1060/35	393 (400-5/8)

