

| | | | |
|--|------------------------|-----------------------------|---|
| WAAS CH 99340 W10E | APP CRS 093° | Rwy Ldg TDZE Apt Elev | 7500 680 680 |
|--|------------------------|-----------------------------|---|

RNAV (GPS) Z RWY 10R


CHICAGO O'HARE INTL (ORD)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C (-2°F) or above 54°C (130°F). Simultaneous approach authorized. Use of FD or AP providing RNAV track guidance required during simultaneous operations. LNAV procedure NA during simultaneous operations. DME/DME RNP-0.3 NA. For inop ALS, increase LNAV Cat C and D visibility to RVR 6000.



MISSED APPROACH: Climb to 1200 then climbing right turn to 4000 direct DPA VOR/DME and hold.


| | | | | | | |
|--|---|------------------------------------|---|---|--------------------------|-------|
| D-ATIS 135.4 282.225 | CHICAGO APP CON 119.0 292.125 | O'HARE TOWER 133.0 348.0 | GND CON (TWR NORTH) 124.125 (TWR SOUTH) 118.05 (ALL TWRs) 226.675 | (TWR CENTER) (OBND) 121.75 (IBND) 121.9 | CLNC DEL 121.6 | CPDLC |
|--|---|------------------------------------|---|---|--------------------------|-------|

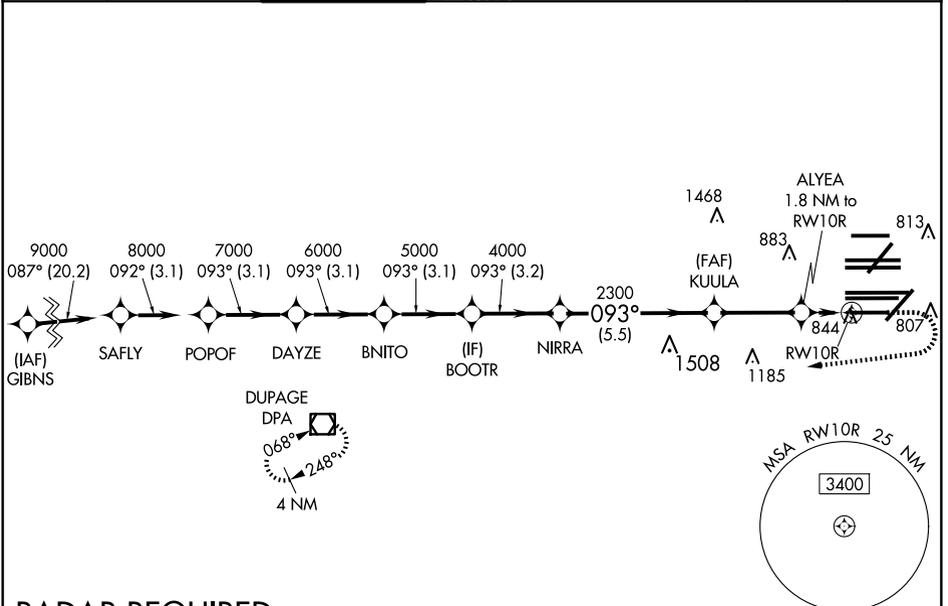

EC-3, 19 FEB 2026 to 19 MAR 2026

EC-3, 19 FEB 2026 to 19 MAR 2026

RADAR REQUIRED

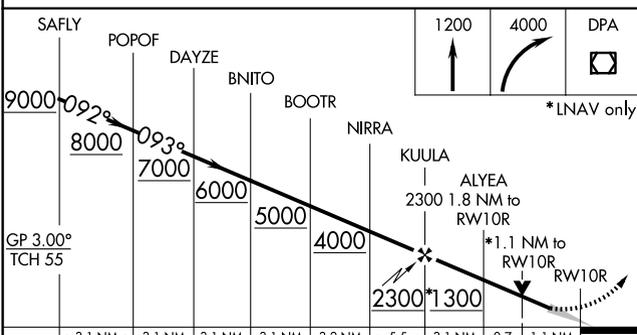

| | |
|----------|-------------------|
| ELEV 680 | D TDZE 680 |
|----------|-------------------|

| | | | | |
|--------------|---------|-------------|-------------|-------------|
| CATEGORY | A | B | C | D |
| LPV DA | | 881/18 | 201 (300-½) | |
| LNAV/VNAV DA | | 1122/50 | 442 (500-1) | |
| LNAV MDA | 1100/24 | 420 (500-½) | 1100/40 | 420 (500-¾) |

