

WAAS CH <b>72809</b>	APP CRS <b>180°</b>	Rwy Ldg TDZE Apt Elev	<b>8536</b> <b>653</b> <b>655</b>
-------------------------	------------------------	-----------------------------	---

# RNAV (GPS) RWY 18




LA CROSSE RGNL (LSE)

RNP APCH - GPS.

**⚠** For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. When local altimeter setting not received, use ONA altimeter setting and increase LPV DA to 907 feet; increase LNAV/VNAV DA to 1174 feet; increase all MDAs 60 feet and Circling visibility Cat B ¼ SM. For inop ALS, increase LNAV/VNAV all Cats visibility to 1 ½ SM, and LNAV Cats C and D to 1 ¾ SM. Baro-VNAV and VDP NA when using ONA altimeter setting.

MALSR  MISSED APPROACH: Climb to 3000 direct PKRNA and hold.

ATIS <b>124.95</b>	MINNEAPOLIS CENTER <b>128.6 363.0</b>	LA CROSSE TOWER ★ <b>118.45 (CTAF) 251.075</b>	GND CON <b>121.8</b>	UNICOM <b>122.95</b>
-----------------------	--	---	-------------------------	-------------------------

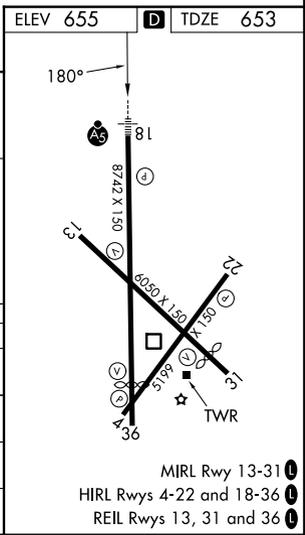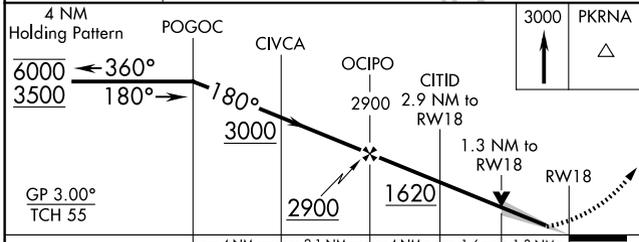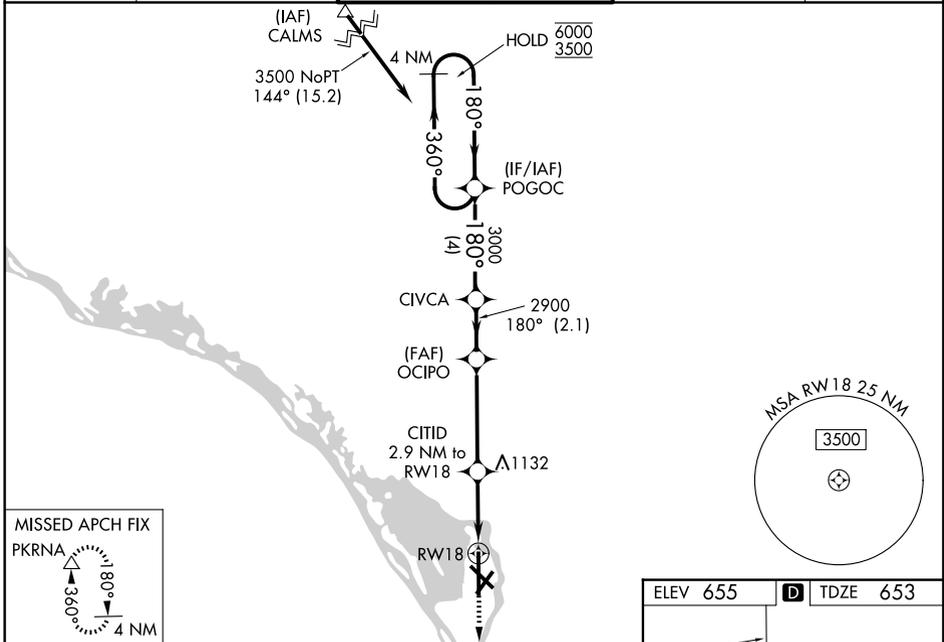

CATEGORY	A	B	C	D
LPV DA	853-½		200 (200-½)	
LNAV/VNAV DA	1120-1		467 (500-1)	
LNAV MDA	1120-½	467 (500-½)	1120-1	467 (500-1)
CIRCLING	1140-1 485 (500-1)	1460-1 805 (900-1)	1760-3 1105 (1200-3)	1820-3 1165 (1200-3)

EC-3, 19 FEB 2026 to 19 MAR 2026

EC-3, 19 FEB 2026 to 19 MAR 2026