
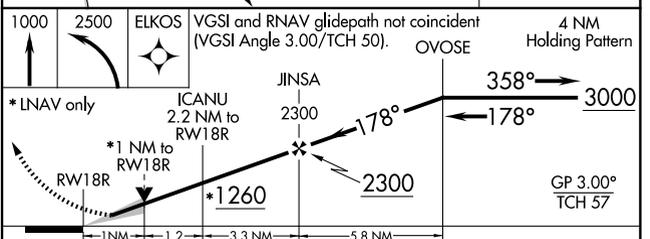
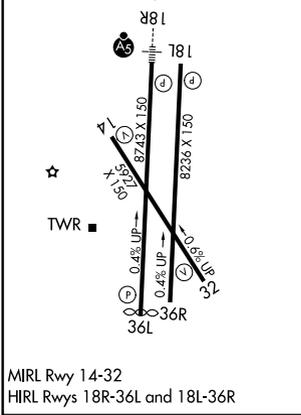


WAAS Ch 82599 W18A	APP CRS 178°	Rwy Ldg 8743 TDZE 504 Apt Elev 508
--	------------------------	---

RNAV (GPS) RWY 18R

LAREDO INTL (L.R.D)

<p>▽ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 1°C (34°F) or above 54°C (130°F). Circling NA West of Rwy 14 and 36L. DME/DME RNP-0.3 NA. ▲ For inop ALS, increase LPV Cat E visibility to ¾ SM, LNAV/VNAV all Cats visibility to 7/8 SM, and LNAV Cats C/D/E to 1 SM.</p>	<p>MALSRL</p>		<p>MISSED APPROACH: Climb to 1000 then climbing left turn to 2500 direct ELKOS and hold.</p>	
	<p>ATIS 125.775</p>	<p>HOUSTON CENTER 127.8 307.2</p>	<p>LAREDO TOWER* 120.1(CTAF) 257.9</p>	<p>GND CON 121.8</p>

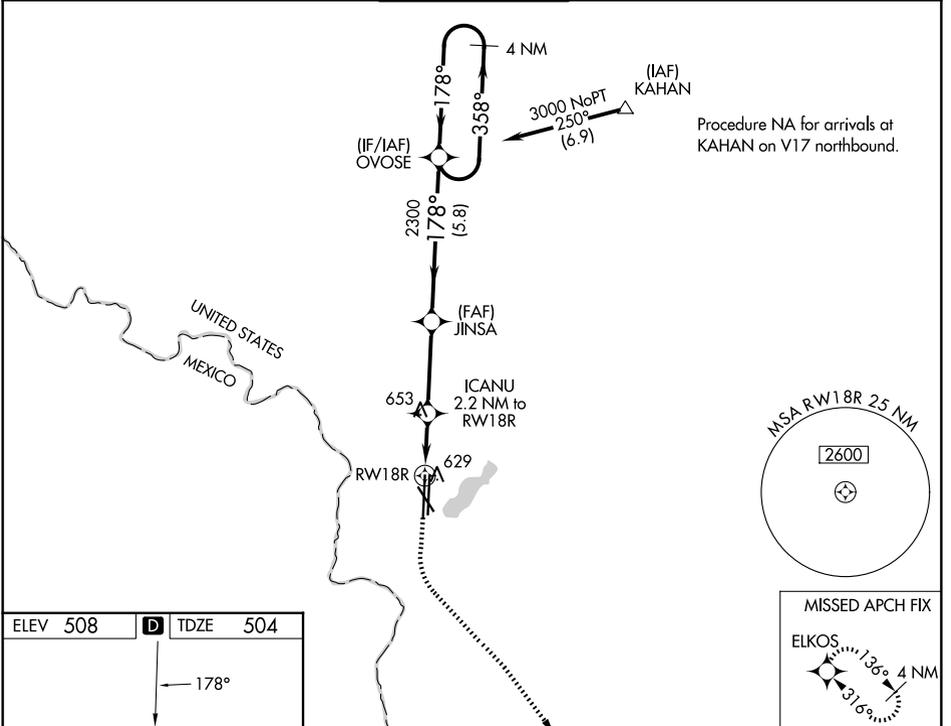

CATEGORY	A	B	C	D	E
LPV DA	704-½		200 (200-½)		
LNAV/VNAV DA	810-½		306 (400-½)		
LNAV MDA	880-½ 376 (400-½)		880-5/8 376 (400-5/8)		
CIRCLING	940-1 432 (500-1)	980-1 472 (500-1)	1100-1½ 592 (600-1½)	1200-2¼ 692 (700-2¼)	1200-2½ 692 (700-2½)