

LAS VEGAS, NEVADA

ILS or LOC X RWY 21L

LOC I-DIQ 109.1	APCH CRS 209°	Rwy Idg 10,051	21L 10,120	21R 1869
		TDZE 1865		
		Arpt Elev 1869		

(USAF)

NELLIS AFB (KLSV)

DME or RADAR required.

- ▼ * When ALS inop, increase RVR to 40, vis to 3/4 mile.
** When ALS inop, increase CAT AB RVR to 55, vis to 1 mile, CAT CDE vis to 1 3/8 miles.
*** Circling not authorized SE of Rwy 3R-21L.





MISSED APPROACH: Climb to 15,000, intercept LSV TACAN R-210 to 2.5 DME (ROCKX), then climbing right turn heading 043° to intercept LSV R-358 to ARCOE and hold, climb in hold to 15,000. Missed approach not for civil use.



ATIS 270.1	APP CON 124.95 273.55	TOWER 132.55 327.0	GND CON 121.8 275.8	CLNC DEL★ 120.9 289.4
---------------	--------------------------	-----------------------	------------------------	--------------------------

Knots	60	120	180	240	300	360
V/V(fpm)	372	744	1116	1488	1860	2232
Min climb of 372 ft/NM to 9400 - Controlling obstacle 5739						

CAUTION: Missed approach with 200 ft/NM climb gradient not available.
MISSED APPROACH requires use of RNAV or ATC RADAR monitoring.
Minimum NAVAID reception at ARCOE 15,000 MSL.

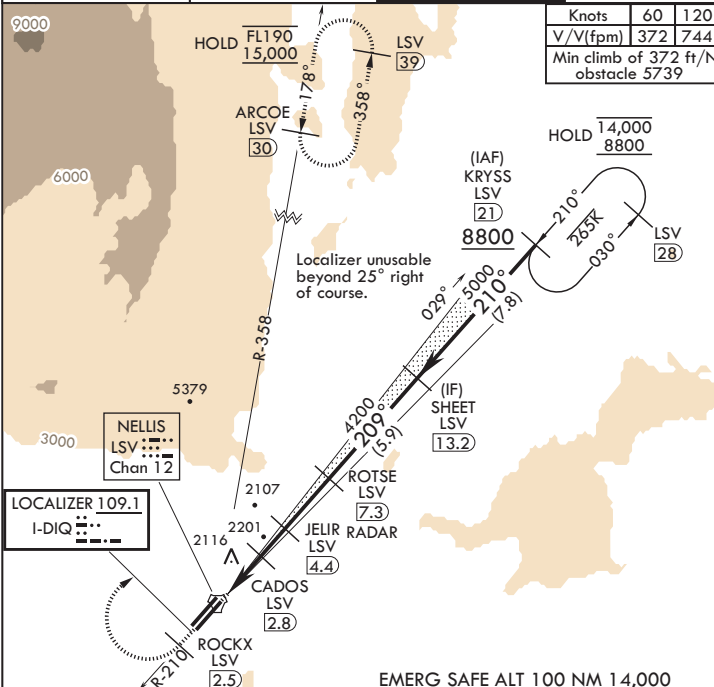

15,000 LSV R-210	ROCKX LSV 2.5	VGSI and ILS glidepath not coincident (VGSI angle 3.00/TCH 54).	ROTSE LSV 7.3	SHEET 13.2 Intep Lczr	ELEV 1869	TDZE 21L 1865	TDZE 21R 1869
------------------	---------------	---	---------------	-----------------------	-----------	---------------	---------------

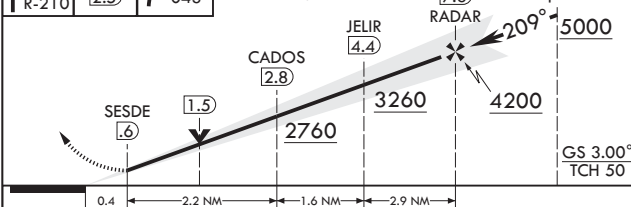

CATEGORY	A	B	C	D	E
S-ILS 21L*	2065/24		200		(200-1/2)
S-LOC 21L**	2360/24	495 (500-1/2)	2360/50	495	(500-1)
SIDESTEP 21R	2380-1	511 (600-1)	2380-1 3/4	511	(600-1 3/4)
CIRCLING***	2400-1 531 (600-1)	2460-1 591 (600-1)	2560-2 691 (700-2)	2840-3 971 (1000-3)	3140-3 1271 (1300-3)

FAF to MAP 6.7 NM						
Knots	60	90	120	150	180	
Min:Sec	6:42	4:28	3:21	2:41	2:14	

LAS VEGAS, NEVADA

36°14'N - 115°02'W

NELLIS AFB (KLSV)

Amdt 11 10JUL25

ILS or LOC X RWY 21L

SW-4, 19 FEB 2026 to 19 MAR 2026

SW-4, 19 FEB 2026 to 19 MAR 2026