

LOC/DME I-LNR	APP CRS	Rwy Ldg	5000
108.35	270°	TDZE	717
Chan 20(Y)		Apt Elev	717

LOC RWY 27

TRI-COUNTY RGNL (LNR)

DME required. RADAR required for procedure entry.


NA
 31°C
 Circling Rwy 18, 36 NA at night. Rwy 27 helicopter visibility reduction below 3/4 SM NA. If local altimeter setting not received, use Dane County Rgnl-Truax Fld altimeter setting and increase all MDA 120 feet. Increase S-27 visibility Cat A/B 1/4 SM, Cat C 1/2 SM, Circling visibility Cat B 1/4 SM, Cat C 1/2 SM. Increase BOCAV fix minimums S-27 visibility Cat C 1/4 SM, Circling Cat A/B 1/4 SM, Cat C 1/2 SM.

MISSED APPROACH:
 Climb to 2200 then climbing right turn to 3300 on heading 070° and on DLL R-224 to LENRE/DLL VORTAC 18 DME and hold.

ASOS
119.425


MADISON APP CON ★
135.45 343.7

UNICOM
123.0 (CTAF) 0

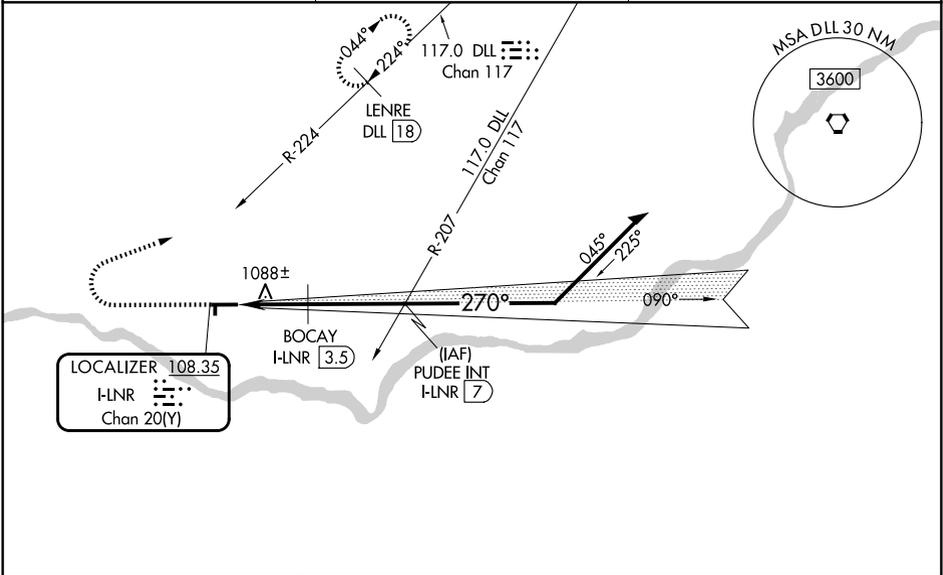

EC-3, 19 FEB 2026 to 19 MAR 2026

EC-3, 19 FEB 2026 to 19 MAR 2026

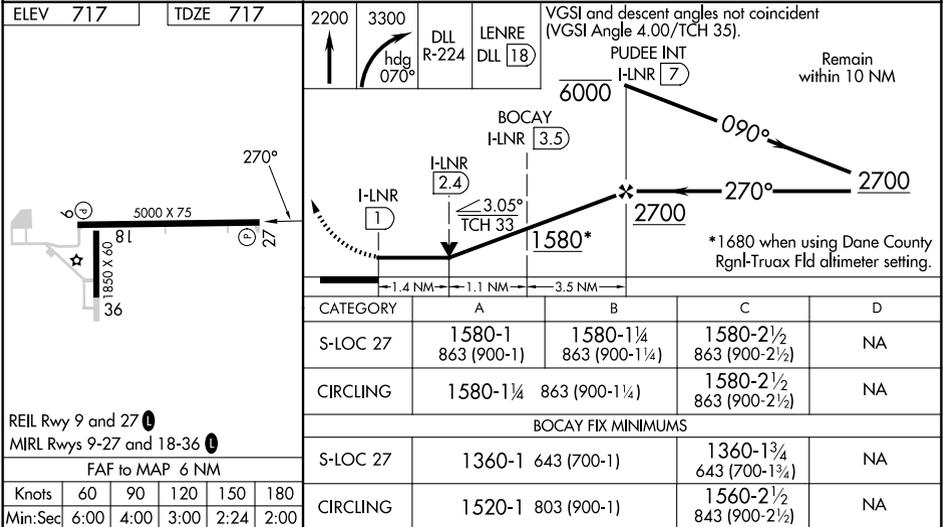

REIL Rwy 9 and 27 0
 MIRL Rwys 9-27 and 18-36 0
 FAF to MAP 6 NM

Knots	60	90	120	150	180
Min:Sec	6:00	4:00	3:00	2:24	2:00