

APP CRS	Rwy Ldg	11259
071°	TDZE	128
	Apt Elev	128

RNAV (RNP) Z RWY 7L

LOS ANGELES INTL (LAX)

V For uncompensated Baro-VNAV systems, procedure NA below 5°C (41°F) or above 54°C (130°F). GPS required. Simultaneous approach authorized. For inop ALS, increase RNP 0.11 all Cats visibility to RVR 5000 and RNP 0.30 all Cats visibility to RVR 6000.




MALSR



MISSED APPROACH: Climb to 3000 on track 071° to FILBA and on track 072° to DOWNE and hold.

D-ATIS	SOCAL APP CON				LOS ANGELES TOWER		GND CON	
133.8	124.3	363.2	(APCH from W)	124.9	269.0	(090°-224°)	121.65	327.0
	124.5	235.975	(225°-044°)	128.5	360.7	(045°-089°)	121.75	327.0
							121.4	327.0
								(N)
								(S)
								(W)

LOS ANGELES TOWER		GND CON	
133.9	239.3	(N)	121.65
120.95	379.1	(S)	121.75
			121.4
			327.0
			327.0

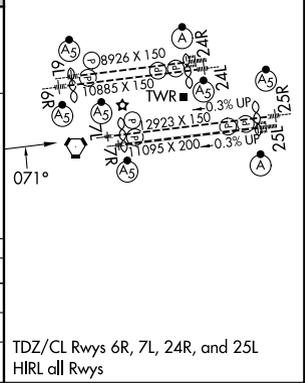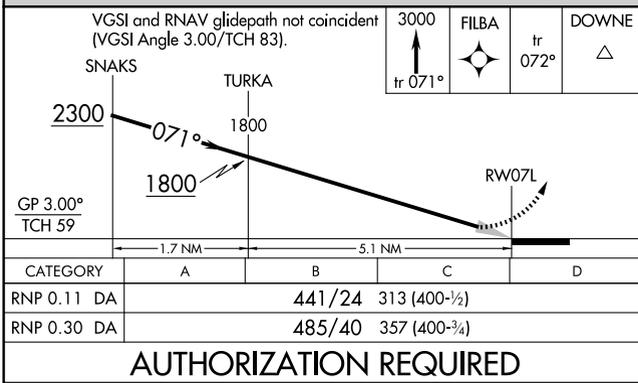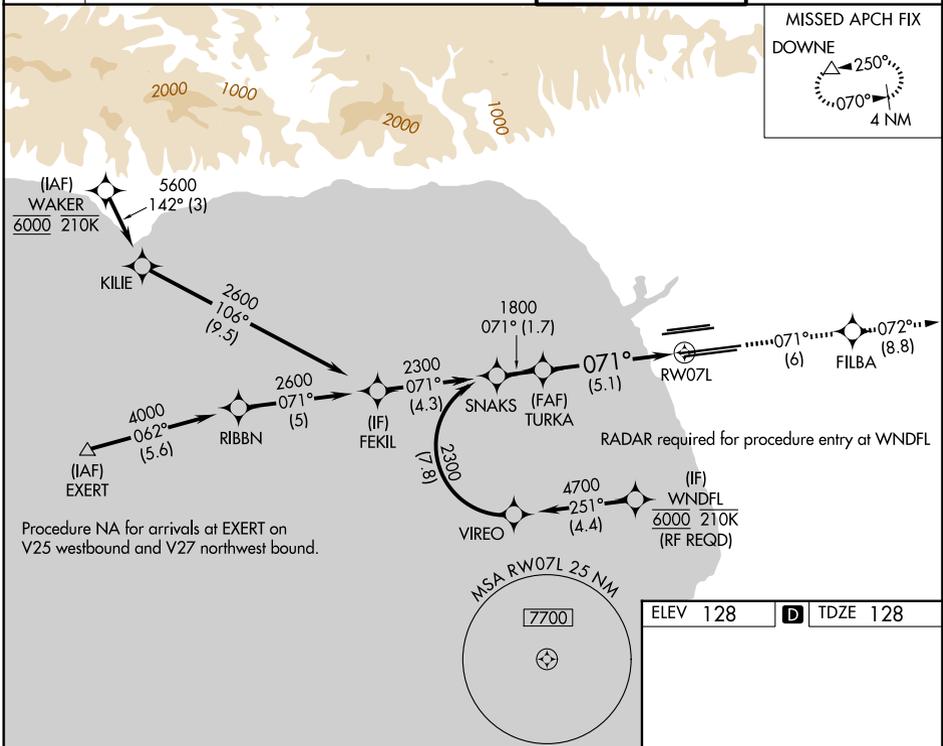

SW-3, 19 FEB 2026 to 19 MAR 2026

SW-3, 19 FEB 2026 to 19 MAR 2026