


LOC I-LKS 109.1	APP CRS 297°	Rwy Ldg TDZE 7250 480 Apt Elev 501
---------------------------	------------------------	---

LOC RWY 29


LOUISVILLE MUHAMMAD ALI INTL (SDF')

RADAR required. ADF or DME required.		MALS R	MISSED APPROACH: Climb to 1100 then climbing left turn to 4000 heading 268° and on ILL VORTAC R-279 to DAMEN and hold.
<p>⚠ Circling Rwy 11 NA at night. Rwy 29 helicopter visibility reduction below RVR 4000 NA. For inop ALS, increase S-29 visibility Cats A/B to RVR 5500 and Cats C/D to 1½ SM.</p>			


D-ATIS 118.725	LOUISVILLE APP CON 132.075 327.0	LOUISVILLE TOWER 124.2 257.8	GND CON 121.7 348.6
--------------------------	--	--	-------------------------------

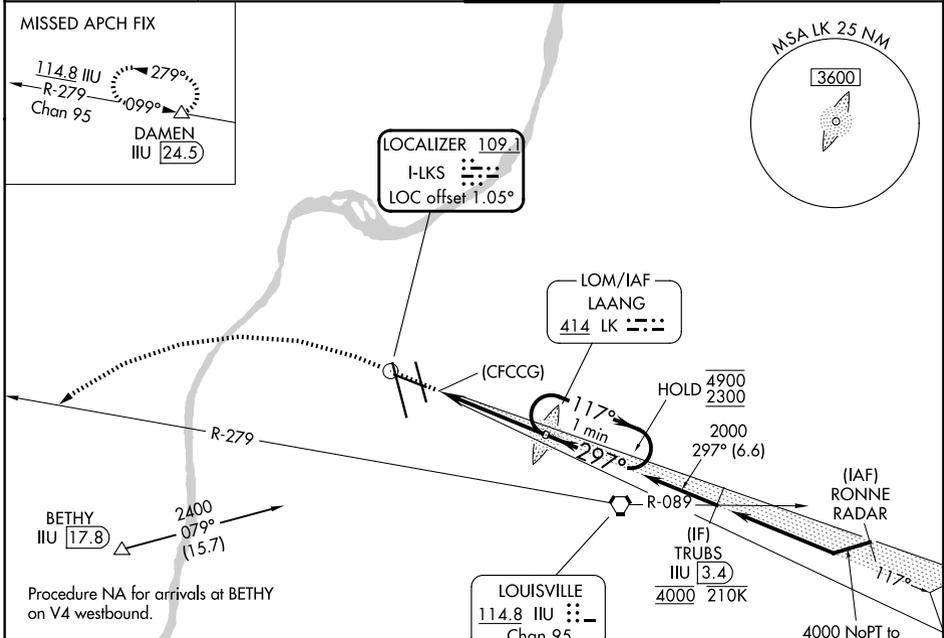

ELEV 501	D	TDZE 480
----------	----------	----------

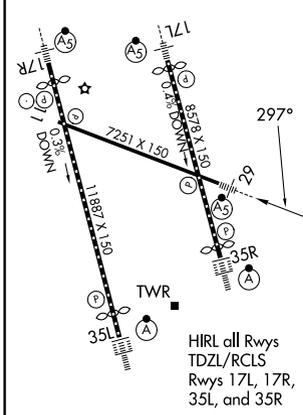

1100	4000	IIU R-279	DAMEN	VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 56).
↑	hdg 268°		△	One Minute Holding Pattern

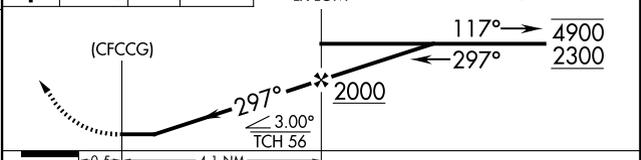

FAF to MAP 4.1 NM								
Knots	60	90	120	150	180			
Min:Sec	4:06	2:44	2:03	1:38	1:22			
CATEGORY	A		B		C		D	
S-29	1060/40		580 (600-¾)		1060-1¼		580 (600-1¼)	
CIRCLING	1060-1 559 (600-1)		1140-1 639 (700-1)		1160-1¾ 659 (700-1¾)		1400-3 899 (900-3)	

SE-1, 19 FEB 2026 to 19 MAR 2026

SE-1, 19 FEB 2026 to 19 MAR 2026