

WAAS CH 90101 W17B	APP CRS 170°	Rwy Ldg TDZE 499 Apt Elev 501	7800
--	------------------------	---	-------------

RNAV (GPS) Y RWY 17L

LOUISVILLE MUHAMMAD ALI INTL (SDF)


RNP APCH - GPS.

▼ Simultaneous approach authorized. Circling Rwy 11 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -13°C or above 54°C. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 6000.

▲ MISSED APPROACH: Climb to 1000 then climbing left turn to 3000 direct ILL VORTAC and hold, continue climb-in-hold to 3000.


MALS R

D-ATIS 118.725	LOUISVILLE APP CON 132.075 327.0	LOUISVILLE TOWER 124.2 257.8	GND CON 121.7 348.6
--------------------------	--	--	-------------------------------

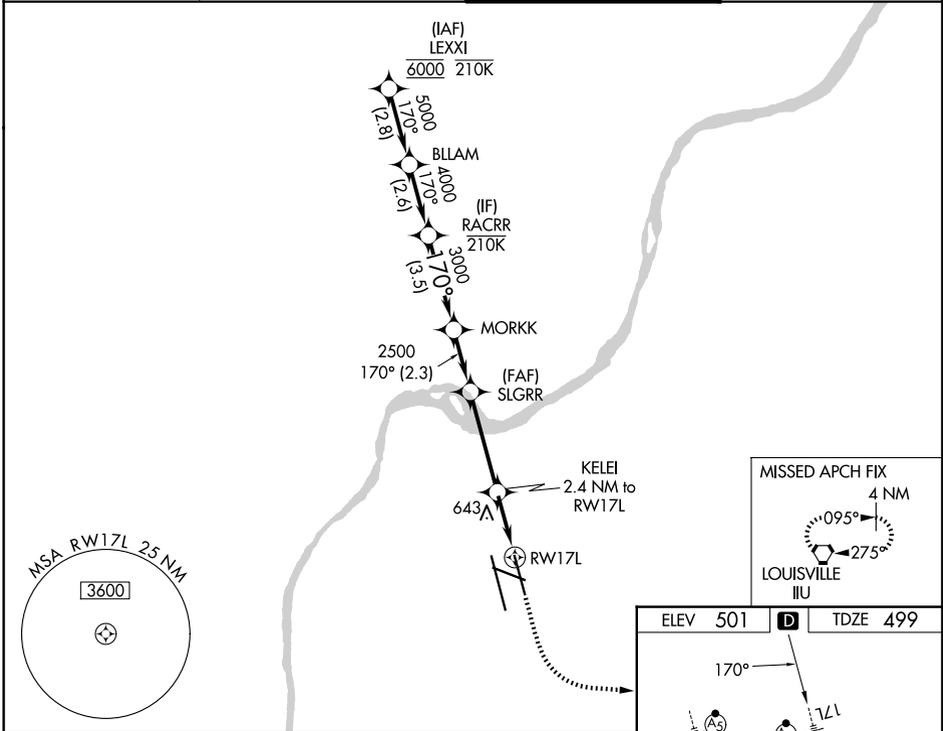

VGSI and RNAV glidepath not coincident (VGSI Angle 3.32/TCH 71).

	1000	3000	ILL
RACRR	MORKK	SLGRR	KELEI
4000	3000	2500	2.4 NM to RWY 17L
GP 3.00°			1 NM to RWY 17L
TCH 55		1320	
	3.5 NM	2.3 NM	3.7 NM
CATEGORY	A	B	C
LPV DA		699/18	200 (200-½)
LNAV/VNAV DA		909/40	410 (500-¾)
LNAV MDA	920/24	421 (500-½)	920/40
CIRCLING	1040-1 539 (600-1)	1140-1 639 (700-1)	1160-1¾ 659 (700-1¾)

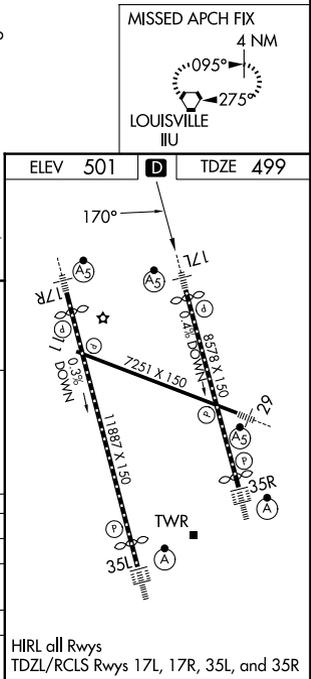

SE-1, 19 FEB 2026 to 19 MAR 2026

SE-1, 19 FEB 2026 to 19 MAR 2026