

WAAS CH <b>53609</b> <b>W26A</b>	APP CRS <b>259°</b>	Rwy Ldg TDZE Apt Elev	<b>7815</b> <b>548</b> <b>565</b>
--	------------------------	-----------------------------	---

# RNAV (GPS) RWY 26

EASTERN WV RGNL/SHEPHERD FLD (MRB)

RNP APCH - GPS.


▼ Baro-VNAV and VDP NA when using HGR altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.

▲ When local altimeter setting not received, use HGR altimeter setting: increase LPV DA to 868 feet; increase LNAV/VNAV DA to 1283 feet and all visibilities ¼ SM; increase all MDAs 80 feet and LNAV visibility Cts C/D/E ¼ SM, and Circling visibility Cts C/D ¼ SM. For inop ALS, increase LPV Cat E visibility to ¾, LNAV/VNAV Cat E to 2¼, and LNAV Cat E to 1½. For inop ALS when using HGR altimeter setting, increase LPV all Cts visibility to 1, LNAV/VNAV Cat E visibility to 2½, and LNAV Cat E visibility to 1¾.


MALS R

MISSED APPROACH: Climb to 4100 direct JOSRU and hold, continue climb-in-hold to 4100.

ASOS <b>119.925</b>	POTOMAC APP CON <b>126.825 239.025</b>	MARTINSBURG TOWER ★ <b>124.3 (CTAF) 0 233.7</b>	GND CON <b>121.8 257.65</b>	UNICOM <b>122.95</b>
------------------------	---	--	--------------------------------	-------------------------

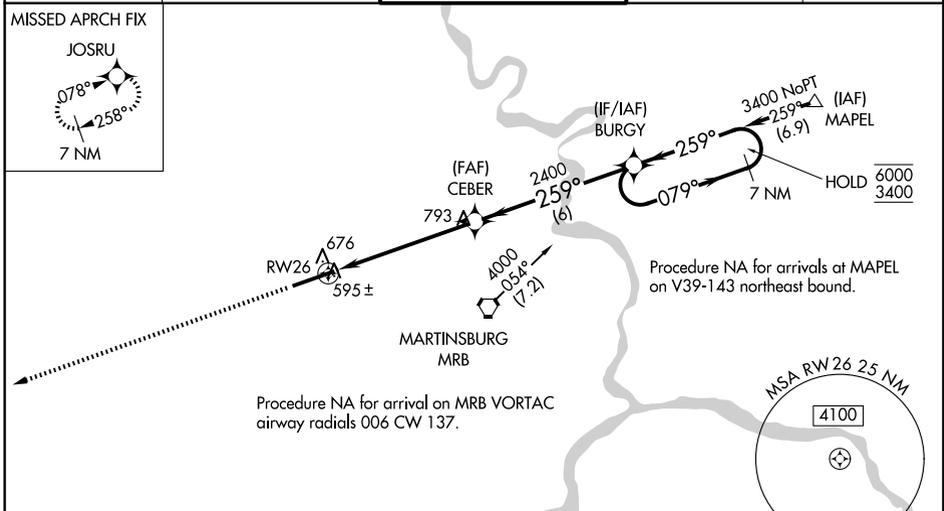

ELEV 565	D	TDZE 548
----------	---	----------

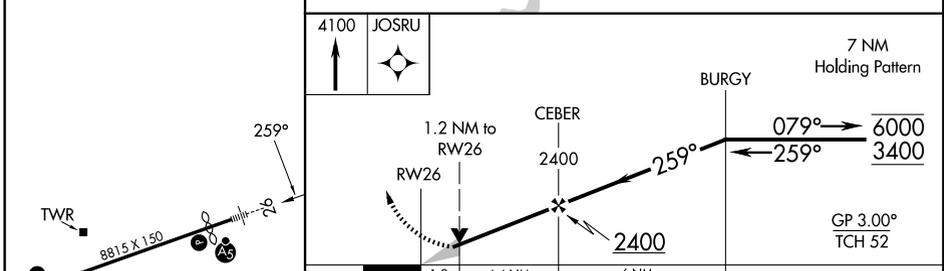

CATEGORY	A	B	C	D	E
LPV DA	798-½		250 (300-½)		
LNAV/VNAV DA	1213-1¾		665 (700-1¾)		
LNAV MDA	980-½	432 (500-½)	980-¾ 432 (500-¾)	980-1	432 (500-1)
CIRCLING	1100-1 535 (600-1)	1240-1 675 (700-1)	1240-2 675 (700-2)	1320-2½ 755 (800-2½)	2180-3 1615 (1700-3)

NE-4, 19 FEB 2026 to 19 MAR 2026

NE-4, 19 FEB 2026 to 19 MAR 2026