

LOC I-CID <b>109.3</b>	APP CRS <b>089°</b>	Rwy Ldg TDZE Apt Elev	<b>8175</b> <b>857</b> <b>869</b>
---------------------------	------------------------	-----------------------------	---

# ILS or LOC RWY 9


THE EASTERN IOWA (CID)

**⚠** When local altimeter setting not received, use Iowa City altimeter setting and increase all DA 64 feet and all MDA 80 feet; increase S-LOC Cat D visibility to RVR 6000. OPHAW fix minimums: increase S-LOC Cat C visibility to RVR 4000 and Cat D to RVR 6000. When using Iowa City altimeter setting, for inop MALSR, increase S-ILS 9 all Cats visibility to RVR 5000. Autopilot coupled approach NA below 1100 MSL.  
# RVR 1800 authorized with use of FD or HUD to DA (NA when using Iowa City altimeter setting).


**MALSR**

**MISSED APPROACH:** Climb to 1400 then climb to 2700 via CID VOR/DME R-082 to LISBO/CID VOR/DME 19.1 DME and hold.

ATIS <b>124.15</b>	CEDAR RAPIDS APP CON* <b>119.7 266.8</b>	CEDAR RAPIDS TOWER* <b>118.7 (CTAF) 266.8</b>	GND CON <b>121.6</b>	UNICOM <b>122.95</b>
-----------------------	---	--	-------------------------	-------------------------

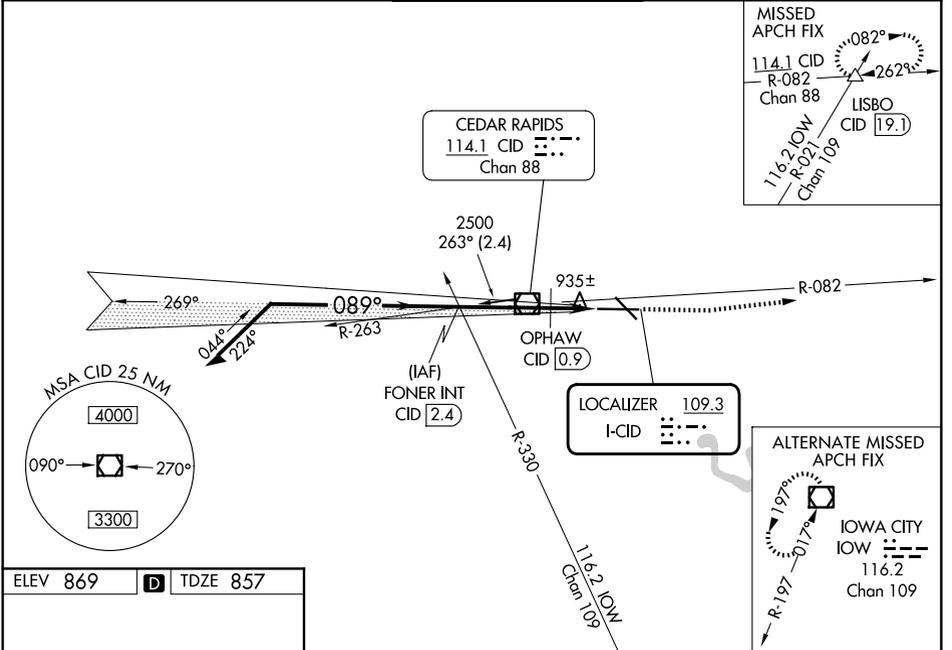

ELEV 869	D	TDZE 857
----------	---	----------



\* 1440 when using Iowa City altimeter setting.

Remain within 10 NM

2500

269°

2500

089°

2500

FONER INT  
CID [2.4]

CID VOR/DME

1400

2700

LISBO  
△

R-082

OPHAW  
CID [0.9]

\* LOC only

CID [2.5]

GS 3.00°  
TCH 49

VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 60).

\* 1360

3.3 NM

1.7 NM

CATEGORY	A	B	C	D
S-ILS 9#	1057/24 200 (200-½)			
S-LOC 9	1360/24 503 (500-½)		1360/50 503 (500-1)	
OPHAW FIX MINIMUMS				
S-LOC 9	1220/24 363 (400-½)			1220/40 363 (400-¾)

NC-3, 19 FEB 2026 to 19 MAR 2026

NC-3, 19 FEB 2026 to 19 MAR 2026