


WAAS CH 93607 W27A	APP CRS 273°	Rwy Ldg TDZE Apt Elev	8946 292 341
--	------------------------	-----------------------------	---



RNAV (GPS) RWY 27

FREDERICK W SMITH INTL (MEM)

RNP APCH - GPS.		MALSR	MISSED APPROACH: Climb to 5000 direct AVADE and on track 279° to GOWRI and hold, continue climb-in-hold to 5000.
<p>▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -9°C or above 54°C. For inop ALS, increase LNAV Cat C and D visibility to 1½ SM. *RVR 1800 authorized with use of FD or AP or HUD to DA.</p>			
MEMPHIS APP CON	MEMPHIS TOWER	GND CON	
119.1 291.6 (176°-355°)	(Rwy 9-27) 118.3 257.8	(Rwy 9-27) 121.0 379.2	
125.8 338.3 (356°-175°)	(Rwys 18C-36C, 18L-36R) 119.7 257.8	(Rwys 18C-36C, 18L-36R) 121.9 379.2	
	(Rwy 18R-36L) 128.425 257.8	(Rwy 18R-36L) 121.65 379.2	

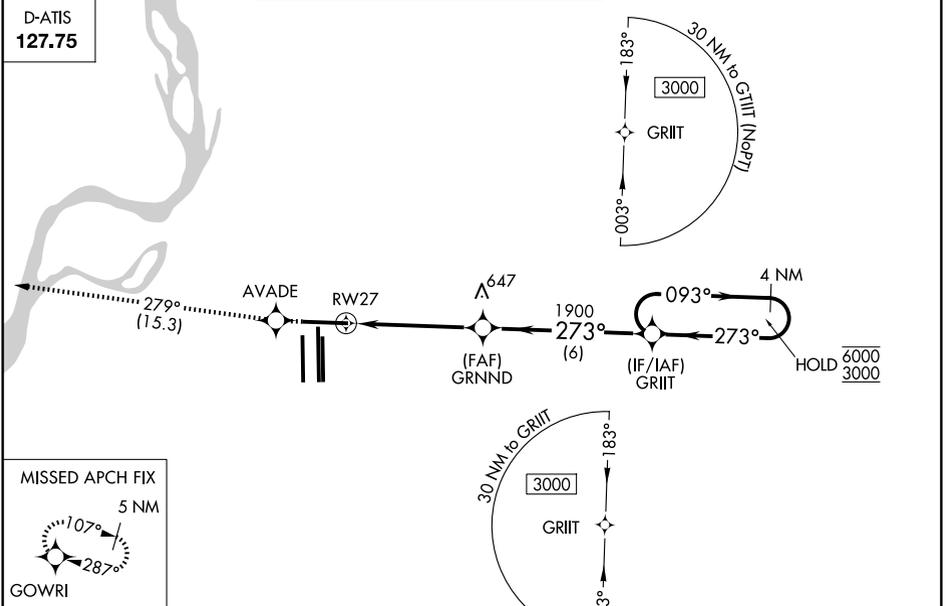

ELEV 341	D	TDZE 292
----------	----------	----------

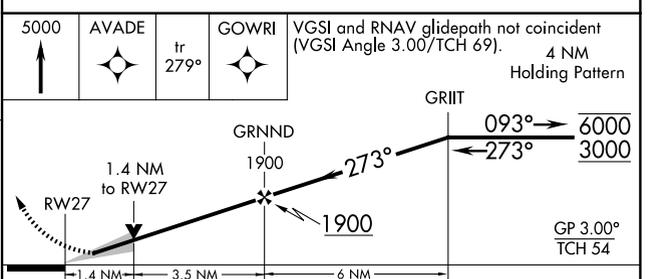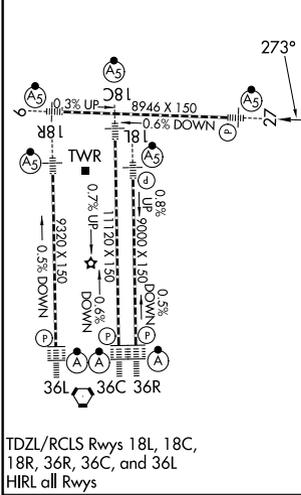

CATEGORY	A	B	C	D
LPV DA *	492/24		200 (200-½)	
LNAV/VNAV DA	745/50		453 (500-1)	
LNAV MDA	800/24	508 (500-½)	800/55	508 (500-1)
CIRCLING	940-1	599 (600-1)	940-1½ 599 (600-1½)	1020-2¼ 679 (700-2¼)

SE-1, 19 FEB 2026 to 19 MAR 2026

SE-1, 19 FEB 2026 to 19 MAR 2026