




LOC I-MIA <b>109.5</b>	APP CRS <b>272°</b>	Rwy Ldg <b>12755</b> TDZE <b>9</b> Apt Elev <b>9</b>
---------------------------	------------------------	--

# ILS or LOC RWY 27

MIAMI INTL (MIA)

DME required. RNP APCH-GPS. From TUBBZ.		MALSR 	MISSED APPROACH: Climb to 800 then climbing right turn to 4000 on heading 290° and DHP VORTAC R-335 to BRBRA/DHP 11.5 DME and hold, continue climb-in-hold to 4000.
	Simultaneous approach authorized. Inp table does not apply to S-LOC 27 Cats C/D. * RVR 1800 authorized with use of FD or AP or HUD to DA.		

D-ATIS <b>119.15</b>	MIAMI APP CON <b>124.85 322.3</b>	MIAMI TOWER <b>118.3 256.9</b>	GND CON <b>121.8</b> (8L/8R/12/26L/26R) <b>127.5</b> (9/27/30) <b>348.6</b>
-------------------------	--------------------------------------	-----------------------------------	---

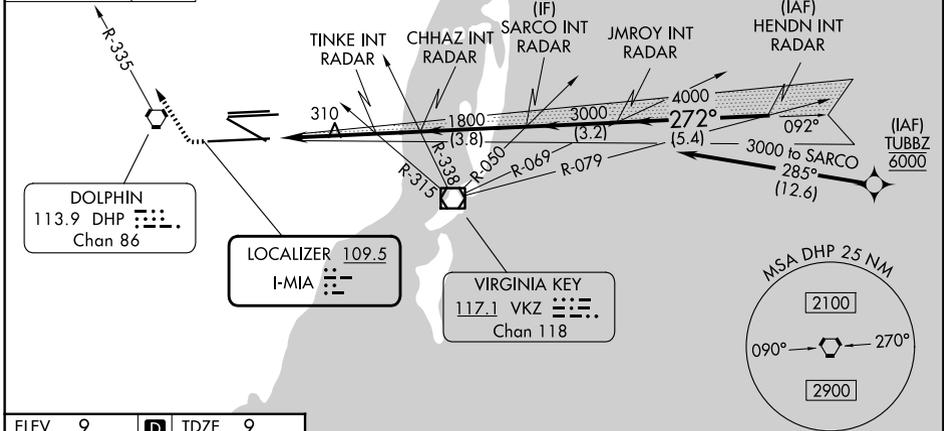


ELEV 9	<b>D</b>	TDZE 9
--------	----------	--------

Obstacle Diagram

Towers: TW, T1, T2, T3, T4, T5, T6, T7, T8, T9, T10, T11, T12, T13, T14, T15, T16, T17, T18, T19, T20, T21, T22, T23, T24, T25, T26, T27, T28, T29, T30, T31, T32, T33, T34, T35, T36, T37, T38, T39, T40, T41, T42, T43, T44, T45, T46, T47, T48, T49, T50, T51, T52, T53, T54, T55, T56, T57, T58, T59, T60, T61, T62, T63, T64, T65, T66, T67, T68, T69, T70, T71, T72, T73, T74, T75, T76, T77, T78, T79, T80, T81, T82, T83, T84, T85, T86, T87, T88, T89, T90, T91, T92, T93, T94, T95, T96, T97, T98, T99, T100

Altitudes: 8600 X 150, 10506 X 200, 2360 X 150, 13016 X 150, 261, 271

Heading: 272°

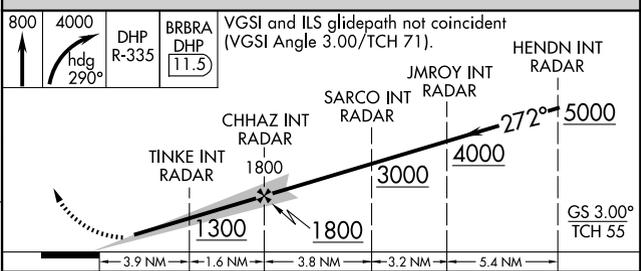

TDZ/CL Rwy 8R REIL Rwy 8L and 26R HIRL all Rwy	TINKE FIX MINIMUMS (DUAL VOR RECEIVERS OR RADAR REQUIRED)				
FAF to MAP 5.5 NM					
Knots	60	90	120	150	180
Min:Sec	5:30	3:40	2:45	2:12	1:50
S-ILS 27 *	209/24 200 (200-½)				
S-LOC 27	1300/40 1291 (1300-¾)	1300/55 1291 (1300-1)	1300-3	1291 (1300-3)	
S-LOC 27	560/24	551 (600-½)	560/60	551 (600-1¼)	

SE-3, 19 FEB 2026 to 19 MAR 2026

SE-3, 19 FEB 2026 to 19 MAR 2026