

MIAMI, FLORIDA

AL-257 (FAA)

26022



APP CRS	Rwy Ldg	<b>10220</b>
<b>272°</b>	TDZE	<b>9</b>
	Apt Elev	<b>9</b>

# RNAV (RNP) Z RWY 26L

MIAMI INTL (MIA)

RNP AR APCH-GPS.		MALSF	MISSED APPROACH: Climb to 800 then climbing right turn to 4000 direct BRBRA and hold, continue climb-in-hold to 4000.
<p>Simultaneous approach authorized. For uncompensated Baro-VNAV systems, procedure NA below 8°C or above 54°C. For inop ALS, increase RNP 0.20 visibility to RVR 5500 for all Cats and increase RNP 0.30 visibility to RVR 6000 for all Cats.</p>			

D-ATIS	MIAMI APP CON	MIAMI TOWER	GND CON
<b>119.15</b>	<b>124.85 322.3</b>	<b>118.3 256.9</b>	<b>121.8 (8L/8R/12/26L/26R)</b> <b>127.5 (9/27/30)</b>

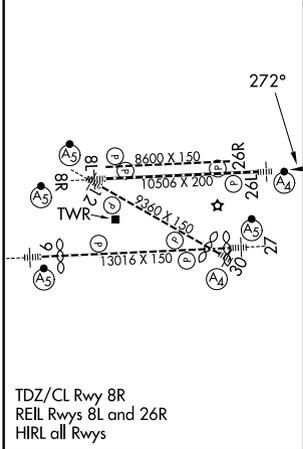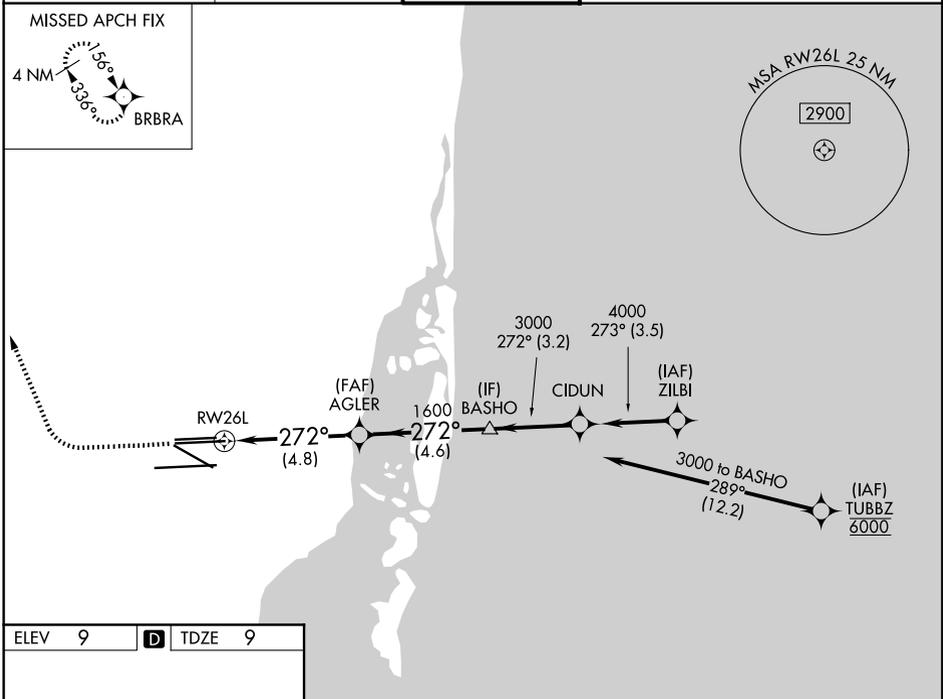

800	4000	BRBRA	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 73).															
<table border="1"> <tr> <td>CATEGORY</td> <td>A</td> <td>B</td> <td>C</td> <td>D</td> </tr> <tr> <td>RNP 0.20 DA</td> <td></td> <td>368/40</td> <td>359 (400-¾)</td> <td></td> </tr> <tr> <td>RNP 0.30 DA</td> <td></td> <td>418/50</td> <td>409 (500-1)</td> <td></td> </tr> </table>				CATEGORY	A	B	C	D	RNP 0.20 DA		368/40	359 (400-¾)		RNP 0.30 DA		418/50	409 (500-1)	
CATEGORY	A	B	C	D														
RNP 0.20 DA		368/40	359 (400-¾)															
RNP 0.30 DA		418/50	409 (500-1)															
<b>AUTHORIZATION REQUIRED</b>																		

MIAMI, FLORIDA  
Amdt 2 12AUG21

25°48'N-80°17'W

MIAMI INTL (MIA)  
**RNAV (RNP) Z RWY 26L**

SE-3, 19 FEB 2026 to 19 MAR 2026

SE-3, 19 FEB 2026 to 19 MAR 2026