

WAAS CH 56225 W30A	APP CRS 301°	Rwy Ldg 10000 TDZE 823 Apt Elev 842
--	------------------------	--

RNAV (GPS) Z RWY 30L

MINNEAPOLIS-ST PAUL INTL/WOLD-CHAMBERLAIN (MSP)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C (-2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Simultaneous approaches authorized with Rwy 30R and ILS V RWY 35 (CONVERGING). Use of FD or AP providing RNAV track guidance required during simultaneous operations. LNAV procedure NA during simultaneous operations. For inop ALS, increase LPV Cat E visibility to RVR 4000, increase LNAV/VNAV Cat E visibility to RVR 5000, and LNAV Cat E visibility to 1 3/8 SM.

ALSF-2


 MISSED APPROACH:
 Climb to 3000 direct
 WOXEB and hold.

ATIS 135.35 239.275



MINNEAPOLIS APP CON 118.725 335.65 (35) 119.3 335.65 (12L-30R, 4-22, 17) 126.95 335.65 (12R-30L)
--

MINNEAPOLIS TOWER 123.675 273.55 (17-35) 123.95 273.55 (12L-30R) 126.7 273.55 (12R-30L, 4-22)

GND CON 121.8 348.6 (N) 121.9 348.6 (S) 127.925 348.6 (W)

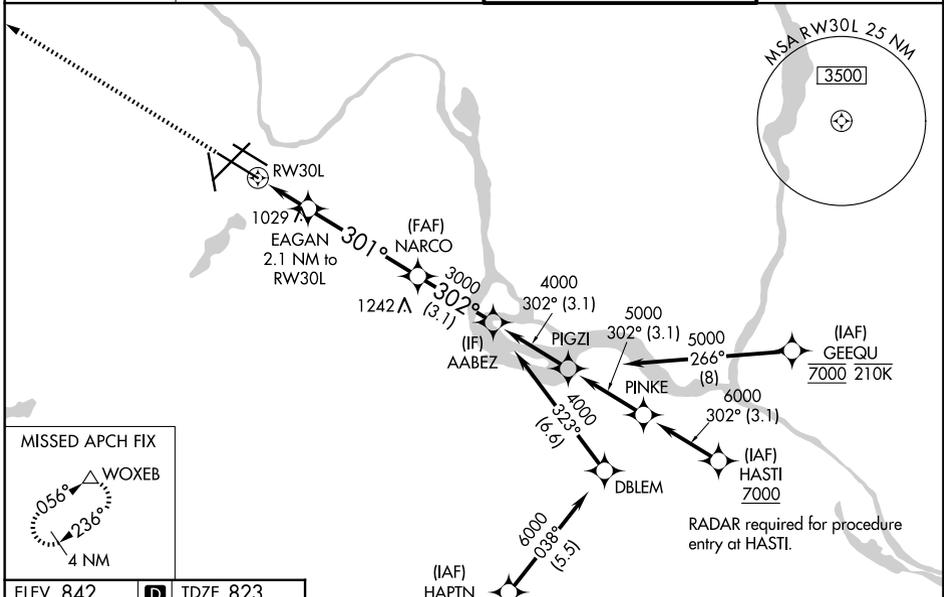

ELEV 842	D	TDZE 823
----------	----------	----------

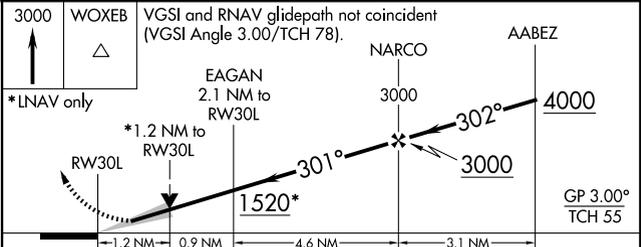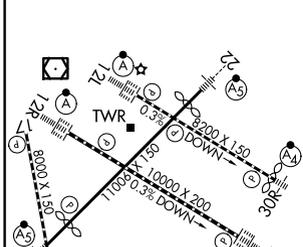

CATEGORY	A	B	C	D	E
LPV DA		1023/18	200 (200-1/2)		
LNAV/VNAV DA		1130/24	307 (300-1/2)		
LNAV MDA	1280/24	457 (500-1/2)	1280/45	457 (500-7/8)	
CIRCLING	1360-1	518 (600-1)	1460-1 3/4 618 (700-1 3/4)	1660-2 3/4 818 (900-2 3/4)	1800-3 958 (1000-3)

NC-1, 19 FEB 2026 to 19 MAR 2026

NC-1, 19 FEB 2026 to 19 MAR 2026