

| | | |
|--|------------------------|--|
| WAAS CH 86824 W27A | APP CRS 270° | Rwy Ldg TDZE 581 Apt Elev 590 |
|--|------------------------|--|

RNAV (GPS) RWY 27

QUAD CITIES INTL (MLI)


⚠ Circling to Rwy 5 NA at night. Baro-VNAV NA when using Davenport altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -26°C (-14°F) or above 40°C (104°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Davenport altimeter setting; increase LPV DA to 828 feet and LNAV/VNAV DA to 1233 feet and LNAV/VNAV visibility all Cats 1/8 SM; increase all MDA 60 feet and LNAV visibility Cats C and D 1/4 SM. Circling visibility Cats C and D 1/4 SM. For inoperative ALS, increase LNAV/VNAV visibility all Cats to 2 SM, LNAV visibility Cats C and D to 1 3/8 SM. When using Davenport altimeter setting increase LNAV visibility Cats C and D to 1 3/8 SM.
****RVR 1800 authorized with use of FD or AP or HUD to DA.**

MALSR





MISSED APPROACH:
Climb to 2300 direct
TOCKY and hold.

| | | | | |
|----------------------|--|--|-------------------------|-------------------------|
| ATIS 121.2 | QUAD CITY APP CON * 125.95 257.8 | QUAD CITY TOWER * 119.4(CTAF) 0 269.55 | GND CON 121.9 | UNICOM 122.95 |
|----------------------|--|--|-------------------------|-------------------------|

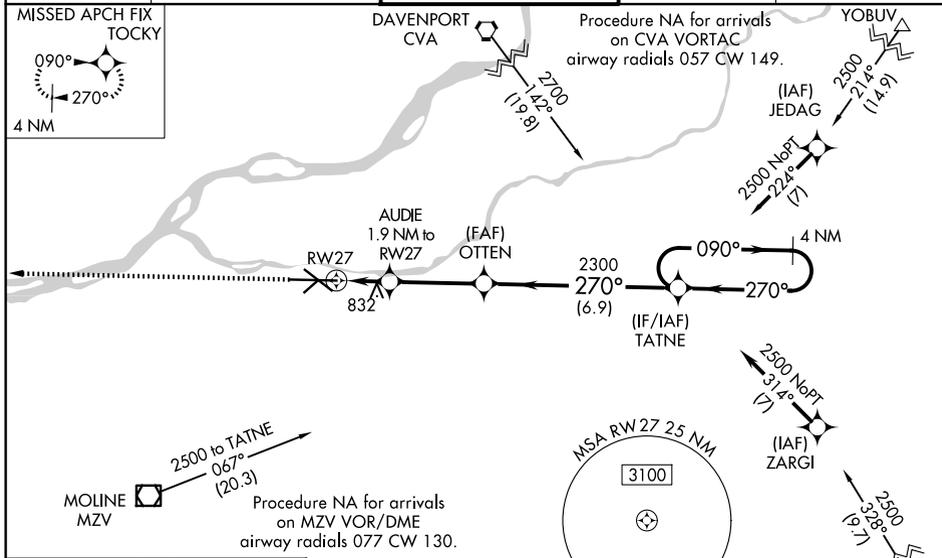

| | | |
|----------|----------|----------|
| ELEV 590 | D | TDZE 581 |
|----------|----------|----------|

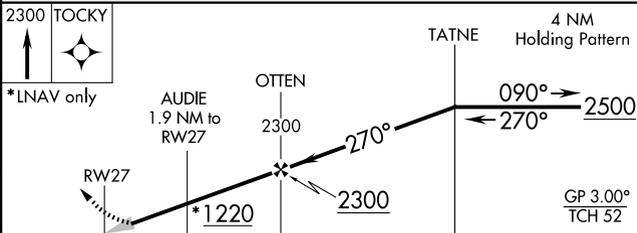

| CATEGORY | A | B | C | D |
|--------------|-----------------------|-----------------------|-----------------------|-------------------------------|
| LPV DA** | | 781/24 | 200 (200-1/2) | |
| LNAV/VNAV DA | | 1186-1 5/8 | 605 (600-1 3/8) | |
| LNAV MDA | 1100/24 | 519 (600-1/2) | 1100/55 | 519 (600-1) |
| CIRCLING | 1140-1 550 (600-1) | 1200-1 610 (700-1) | 1320-2 730 (800-2) | 1420-2 3/4 830 (900-2 3/4) |

MIRL Rwy 5-23
REIL Rwy 13 and 31
HIRL Rwy 9-27 and 13-31

EC-3, 19 FEB 2026 to 19 MAR 2026

EC-3, 19 FEB 2026 to 19 MAR 2026