




LOC/DME I-SSX 109.35 Chan 30 (Y)	APP CRS 201°	Rwy Ldg 8000 TDZE 551 Apt Elev 599
---	------------------------	---

ILS or LOC RWY 20L

NASHVILLE INTL (BNA)

DME required. RADAR required for procedure entry. ▼ Simultaneous approach authorized. ▲ * RVR 1800 authorized with use of FD or AP or HUD to DA.	MALSR MISSED APPROACH: Climb to 1300, then climbing left turn to 4000 on heading 040° and on BNA VORTAC R-072 to LENON/BNA 25.1 DME and hold.
--	--

D-ATIS 135.1	NASHVILLE APP CON 118.4 360.7 (030°-196°) 119.35 372.0 (197°-029°)	NASHVILLE TOWER 118.6 257.8	GND CON 121.9 348.6
------------------------	--	---------------------------------------	-------------------------------

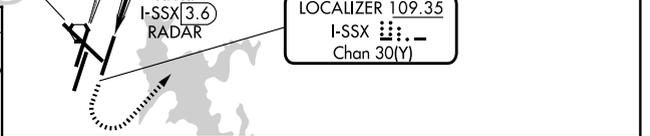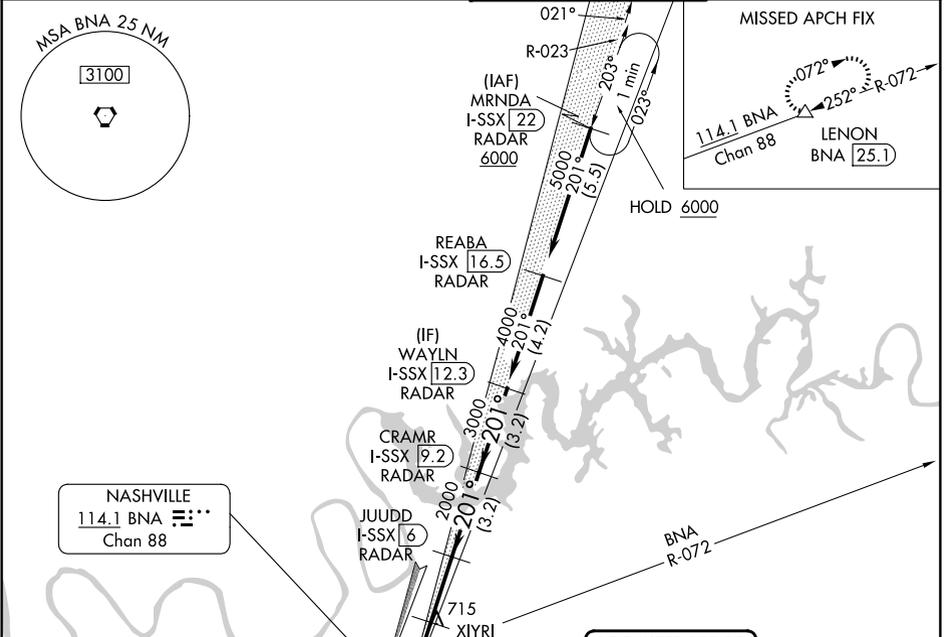

ELEV 599	D	TDZE 551				
1300	4000	BNA R-072	LENON	WAYLN I-SSX 12.3 RADAR		
↑	hdg 040°					
		XIYRI I-SSX 3.6 RADAR	JUUDD I-SSX 6 RADAR	CRAMR I-SSX 9.2 RADAR		
		2000	2000	3000		
		1220	2000	4000		
		1.2 NM	0.8 NM	2.5 NM	3.2 NM	3.2 NM
						GS 3.00° TCH 55

CATEGORY	A	B	C	D
S-ILS 20L*	751/24 200 (200-½)			
S-LOC 20L	980/24	429 (400-½)	980/40	429 (400-¾)
CIRCLING	1100-1 501 (600-1)	1120-1 521 (600-1)	1200-1¾ 601 (700-1¾)	1380-2½ 781 (800-2½)

HIRL all Rwys
TDZL/RCLS Rwys 2L and 2R
REL Rwys 13, 20C, and 31

SE-1, 19 FEB 2026 to 19 MAR 2026

SE-1, 19 FEB 2026 to 19 MAR 2026