

APP CRS	Rwy Ldg	<b>9487</b>
<b>316°</b>	TDZE	<b>578</b>
	Apt Elev	<b>599</b>

# RNAV (RNP) Z RWY 31

NASHVILLE INTL (BNA)

RNP AR APCH - GPS. Authorization required.

▼ For uncompensated Baro-VNAV systems, procedure NA below -10°C or above 54°C.





MISSED APPROACH: Climb to 1400 then climbing left turn to 4000 direct BEVEE and hold.

D-ATIS  
**135.1**

NASHVILLE APP CON  
**118.4 360.7** (030°-196°)  
**119.35 372.0** (197°-029°)

NASHVILLE TOWER  
**118.6 257.8**

GND CON  
**121.9 348.6**

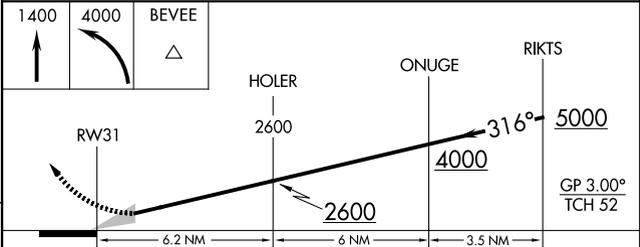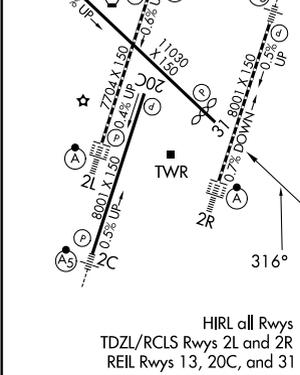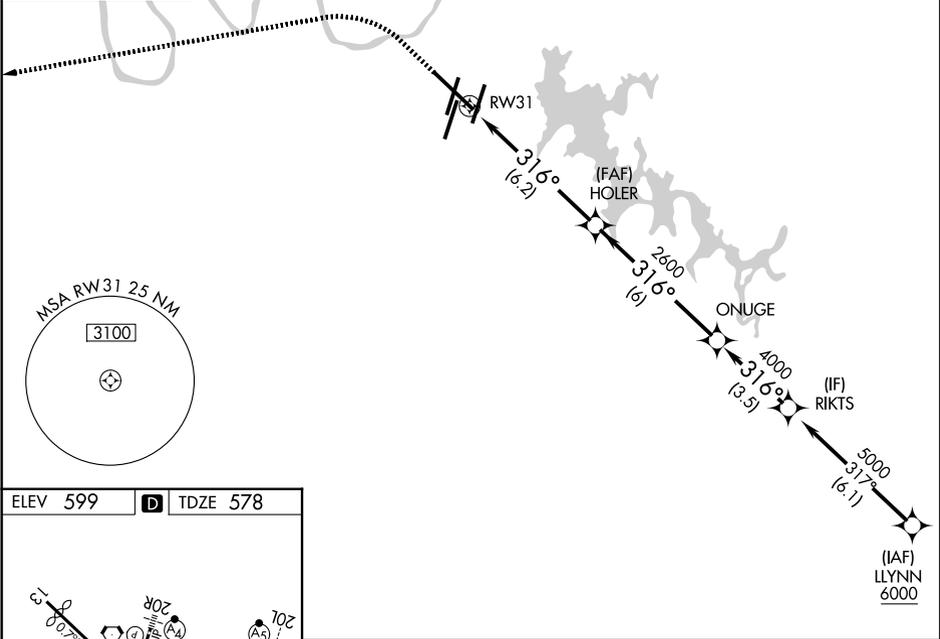

CATEGORY	A	B	C	D
RNP 0.15 DA		914-1	336 (400-1)	
RNP 0.30 DA		1045-1 <sup>3</sup> / <sub>8</sub>	467 (500-1 <sup>3</sup> / <sub>8</sub> )	

**AUTHORIZATION REQUIRED**