

LOC/DME I-GDI 108.5 Chan 22	APP CRS 134°	Rwy Ldg 7002 TDZE 12 Apt Elev 21
---	------------------------	---

ILS or LOC RWY 13


LAGUARDIA (LGA)

Radar required for procedure entry. DME or RADAR required for LOC only.

▼ For inop ALS, increase S-LOC 13 Cats C/D visibility to 2½ SM.
▲ Circling NA northwest of Rwy 4 and southwest of Rwy 13.

MALSR MISSED APPROACH: Climb to 800 then climbing left turn to 2000 on LGA VOR/DME R-043 to GREKO INT/LGA 5.7 DME and hold, continue climb-in-hold to 2000.

D-ATIS 125.95	NEW YORK APP CON 120.8 263.0	LAGUARDIA TOWER 118.7 263.0	GND CON 121.7 263.0
-------------------------	--	---------------------------------------	-------------------------------

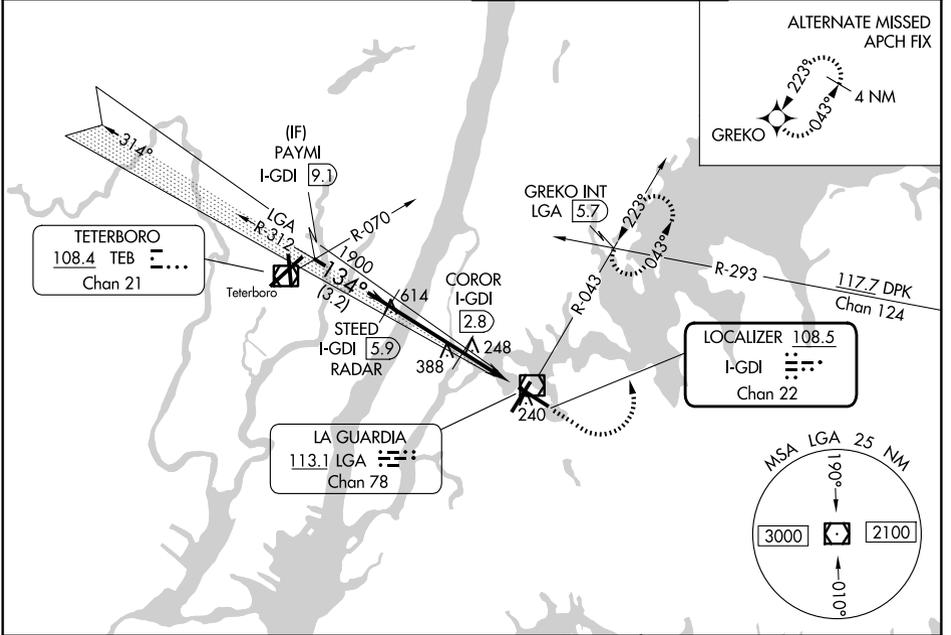

NE-2, 19 FEB 2026 to 19 MAR 2026

NE-2, 19 FEB 2026 to 19 MAR 2026

VGSI and ILS glidepath not coincident (VGSI Angle 3.10/TCH 55).	800	2000	ELEV 21	TDZE 12	
PAYMI I-GDI (9.1)	↑	↻			
STEED I-GDI (5.9) RADAR		LAGA R-043			
*1900 when assigned by ATC		GREKO INT			
*2800	134°				
GS 3.10° TCH 49	1900	800			
	3.2 NM	3.1 NM	1.1 NM	1.3 NM	
CATEGORY	A	B	C	D	
S-ILS 13		212/18	200 (200-½)		
S-LOC 13	800/24 788 (800-½)	800/40 788 (800-¾)	800-1¼ 788 (800-1¼)		
CIRCLING	800-1 779 (800-1)	800-1¼ 779 (800-1¼)	1080-3 1059 (1100-3)	1260-3 1239 (1300-3)	
COROR FIX MINIMUMS					
S-LOC 13	500/24	488 (500-½)	500/50	488 (500-1)	
CIRCLING	700-1	679 (700-1)	1080-3 1059 (1100-3)	1260-3 1239 (1300-3)	
FAF to MAP 5.5 NM					
Knots	60	90	120	150	180
Min:Sec	5:30	3:40	2:45	2:12	1:50

TDZ/CL Rws 4, 13 and 22
 HIRL Rws 4-22 and 13-31
 REIL Rwy 31