




WAAS CH 56503 W17B	APP CRS 176°	Rwy Ldg TDZE 1287 Apt Elev 1296
----------------------------------------	------------------------	-----------------------------------------------------

RNAV (GPS) Y RWY 17L

OKC WILL ROGERS INTL (OKC)

RNP APCH - GPS.		MALS R 	MISSED APPROACH: Climb to 5000 direct JAVXE and hold, continue climb-in-hold to 5000.
⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -12°C or above 54°C. LNAV procedure NA during simultaneous operations. Simultaneous approach authorized. Use of FD or AP required during simultaneous operations. For inop ALS, increase LPV Cat E visibility to RVR 4000, LNAV/VNAV Cat E visibility to RVR 4500, and LNAV all Cats visibility to RVR 5500. * RVR 1800 authorized with use of FD or AP or HUD to DA.	ASR		

D-ATIS 125.85	OKE CITY APP CON 124.6 266.8	ROGERS TOWER 119.35 269.45	GND CON 121.9 348.6
-------------------------	----------------------------------------	--------------------------------------	-------------------------------

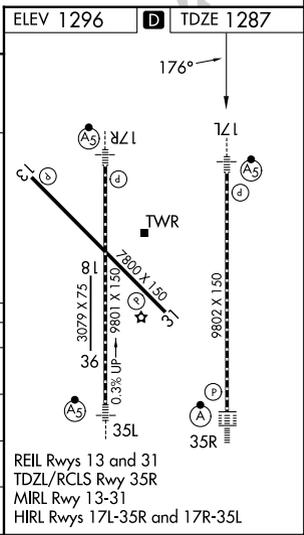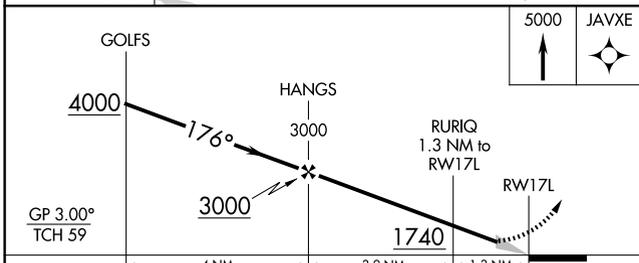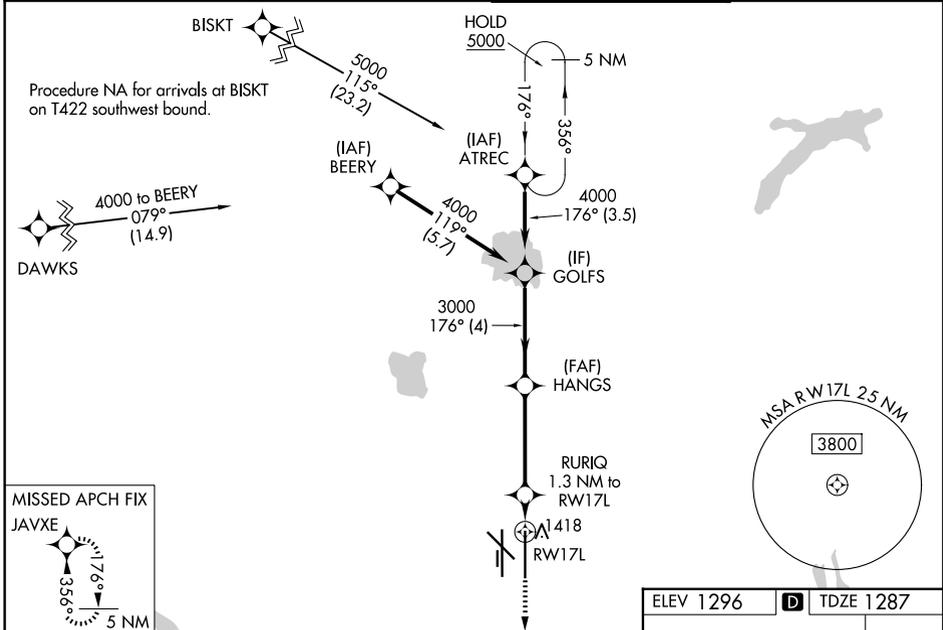

SC-1, 19 FEB 2026 to 19 MAR 2026

SC-1, 19 FEB 2026 to 19 MAR 2026