



HI-ILS or LOC/DME RWY 21L

LOC I-EMJ 110.9	APCH CRS 213°	Rwy Idg TDZE Arpt Elev 9912 1084 1084	[USAF]	LUKE AFB (KLUF)
RADAR required * When ALS inop, increase vis to 3/4 mile. ** When ALS inop, increase vis to 1 1/2 miles.			ALSF-1 A1	MISSED APPROACH: Climbing to 5000, intercept LUF TACAN R-213 to 19 DME (CESAT). Contact LUKE APP CON.
ATIS ★ 134.925 269.85	APP CON ★ 118.15 363.125	TOWER ★ 119.1 379.9	GND CON ★ 133.175 335.8	CLNC DEL ★ 126.25 273.475

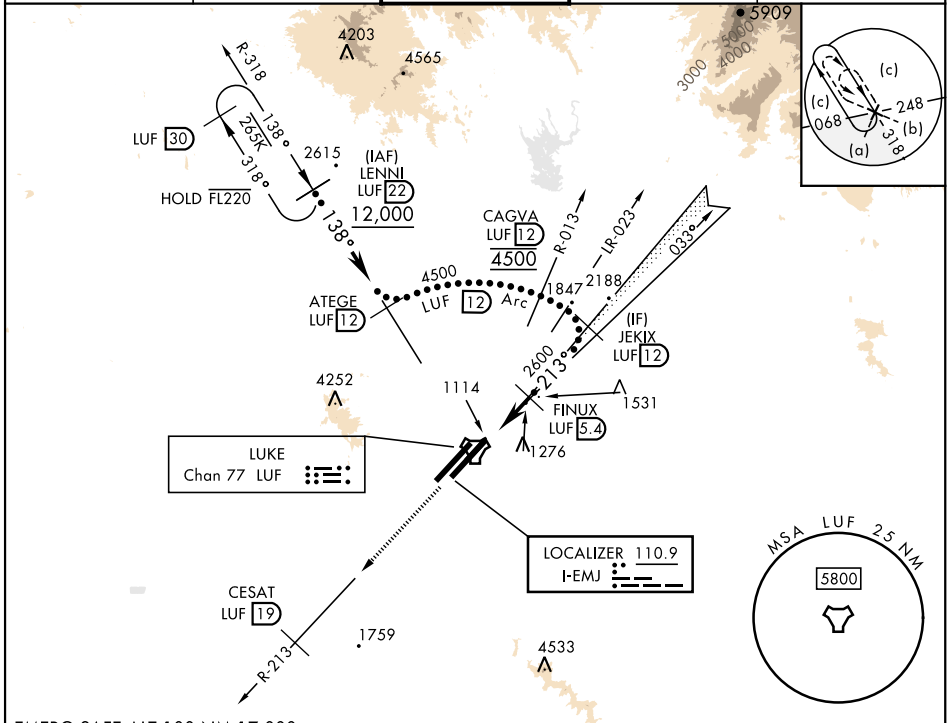

EMERG SAFE ALT 100 NM 17,000

5000 LUF R-213	CESAT LUF 19				
JEVKU LUF 1.4 FINUX LUF 5.4 JEKIX LUF 12 CAGVA R-013 LUF ATEGE LUF 12 LENNI LUF 22 213° 213° 138° 2600 3400 4500 12000 0.6 NM 4.0 NM GS 3.00° TCH 49°					
CATEGORY	C	D	E		
S-ILS 21L *	1284-1/2	200	(200-1/2)		
S-LOC/ **	1600-1	516	(600-1)		
DME 21L					
SIDESTEP 21R	1600-2	516	(600-2)		
CIRCLING	NOT AUTHORIZED				

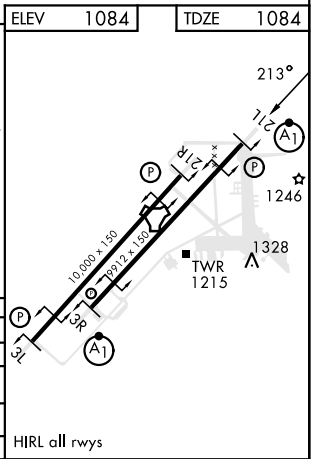

HI-ILS or LOC/DME RWY 21L